

Kanlux



Kanlux ALIN IP55 LED



[V] 220-240 AC	[Hz] 50	≥ 30000	[h] 50000	ellipse $\leq 3\text{K MacAdam}$	Ra 80	SMD
		IP 55		[°C] -20÷35		
[mm°] 0,5÷1	m 0,5m	CE	ErC	UK CA		



AL55-LH-NW-MAT-W-NT



AL55-LH-NW-MAT-W-NT	38862	53,118	7050	4000	matné	X85/Y95	biela
AL55-LH-WW-MAT-W-NT	38972	53,118	6750	3000	matné	X85/Y95	biela
AL55-LH-NW-MAT-B-NT	38975	53,118	7050	4000	matné	X85/Y95	čierna
AL55-LH-WW-MAT-B-NT	38978	53,118	6750	3000	matné	X85/Y95	čierna



AL55-LH-NW-MAT-W-NT




AL55-LH-WW-MAT-W-NT



AL55-LH-NW-MAT-B-NT



AL55-LH-WW-MAT-B-NT

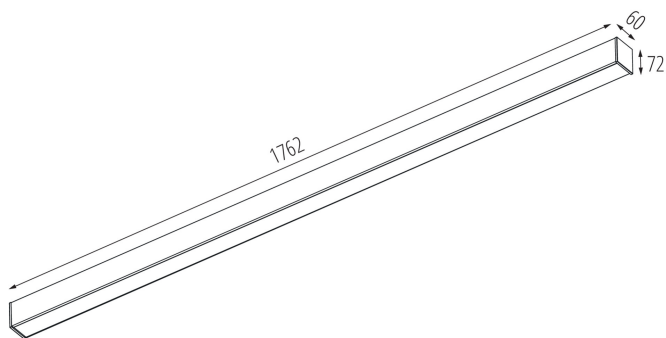

Vytvorený dokument: 01.10.2025, 14:20

Zmena technických parametrov vyhradená. Údaje, ktoré sú uvedené v tomto materiáli, nie sú právne záväzné.

Fotometria: výsledky získané pri testovaní konkrétneho exemplára.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

