

Kanlux



Kanlux ALIN IP55 LED



[V] 220-240 AC	[Hz] 50	 ≥30000	 50000	 ≤3x MacAdam	 Ra 80	 SMD
		IP 55		 -20÷35		
 0,5÷1	 0,5m	CE	ErC	UK CA		



AL55-LL-NW-MAT-W-NT



AL55-LL-NW-MAT-W-NT	38981	33,369	4600	4000	matné	X85/Y95	biela
AL55-LL-WW-MAT-W-NT	38984	33,369	4400	3000	matné	X85/Y95	biela
AL55-LL-NW-MAT-B-NT	38987	33,369	4600	4000	matné	X85/Y95	čierna
AL55-LL-WW-MAT-B-NT	38990	33,369	4600	3000	matné	X85/Y95	čierna



AL55-LL-NW-MAT-W-NT




AL55-LL-WW-MAT-W-NT



AL55-LL-NW-MAT-B-NT



AL55-LL-WW-MAT-B-NT

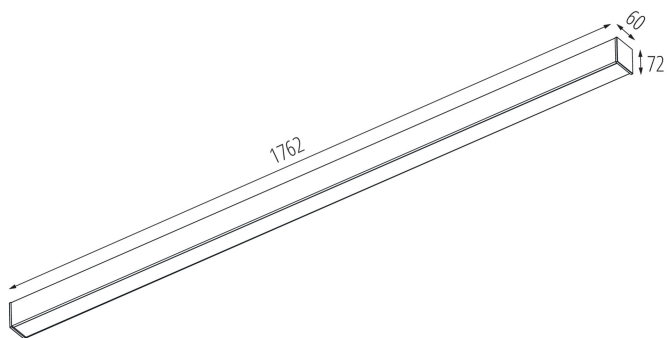

Vytvorený dokument: 01.10.2025, 14:20

Zmena technických parametrov vyhradená. Údaje, ktoré sú uvedené v tomto materiáli, nie sú právne záväzné.

Fotometria: výsledky získané pri testovaní konkrétneho exemplára.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

