


sd2410

5905339181206

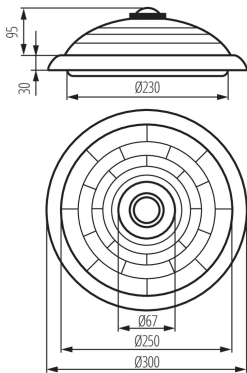

Kanlux FOGLER DL ceiling light fixture with a replaceable light source is a great choice for staircases, basements, attics and similar spaces. The built-in detector with the maximum angle (360°) of motion detection guarantees that the light turns on exactly when we need it.

GENERAL DATA:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Wykrywanie ruchu: yes

Height [mm]: 95

Diameter [mm]: 300

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 2 x max 40

Class of protection against electric shock: I

Lampshade material: glass

Light source: GLS/CFL/LED

Light source included: no

Cap: E27

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Sensor type: PIR

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1-2,5

Sensor-operation time [second-minute]: 12-5

sensor working angle [°]: H360/V120

Illumination-level setpoint by which the sensor detects movement [lx]: 3-2000

IP class: 20

Sensor range[m]: max 8

LOGISTIC DATA:

Packaging method: 5

Number of units in the packaging: 5

Net unit weight [g]: 890

Grammage [g]: 1334

Length of a unit pack [cm]: 32

sd2410



Width of a unit pack [cm] : 11

Height of a unit pack [cm] : 32

Weight of a cardboard box [kg] : 6.67

Width of a cardboard box [cm] : 33

Height of a cardboard box [cm] : 35

Length of a cardboard box [cm] : 55

Volume of a cardboard box [m³] : 0.063525

ADDITIONAL INFORMATION:

- provided with a motion sensor
- maximum horizontal adjustment range for the motion sensor: 360°
- maximum vertical motion sensor angle: 120°
- lighting time adjustable in the range of 5 s to 5 min
- maximum motion detection range: 8 m
- motion detection 0.3...3 m/s (1...10 km/h)

KANLUX S.A. (kat 18120) FOGLER DL-2400 / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 18120) FOGLER DL-2400
Lampy: 2 x A60 40W/c

