


In-ground lighting fitting

5905339181947



IP
67

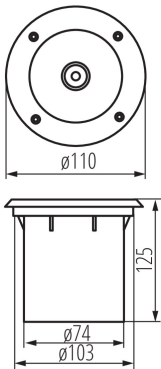

GENERAL DATA:

Colour: stainless steel

Place of assembly: mounted on the ground, in-ground

Minimum distance from the illuminated object: 0,5m

Assembly box included: yes

Replaceable light source: yes

Fixture lighting direction: Top

Height [mm]: 125

Diameter [mm]: 110

Number of chokes: 1

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 20

Class of protection against electric shock: I

Light source: PAR16

Light source included: no

Cap: GU10

Ambient temperature range to which the product can be exposed: -20+35

Enclosure material: aluminum alloy

Panel/frame material: stainless steel

Protective glass material: Tempered glass

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 3x1

Permissible static pressure [kN]: 20

IK class: 08

IP class: 67

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 458

Grammage [g]: 535

Length of a unit pack [cm]: 11

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 13.5

Weight of a cardboard box [kg]: 10.7

Width of a cardboard box [cm]: 24

Height of a cardboard box [cm]: 29

Length of a cardboard box [cm]: 57

Volume of a cardboard box [m³]: 0.039672

In-ground lighting fitting

