

Dustproof lighting fitting

5905339185211



Kanlux MAH PLUS are perfect as lighting of tunnels, industrial halls, garages, workshops, storage sheds or storehouses. Owing to the high class of tightness (IP65), the luminaires can be mounted in places directly exposed to weather conditions.

GENERAL DATA:

Colour: grey
Place of assembly: ceiling mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Possibility of fixture-loop-through connection: yes
Compatible with a dimmer: no
Stabiliser/lamp start: cold
Length [mm]: 1265
Width [mm]: 125
Height [mm]: 92
Number of chokes: 1
Number of clasps: 8

TECHNICAL DATA:


Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 2 x 36
Class of protection against electric shock: I
Lampshade material: PC
Light source: T8
Light source included: no
Cap: G13
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: plastic
Handle material: Metal
Clasp material: plastic
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 1÷2,5
Stabiliser type: EVG
Stabiliser energy class: A2
IP class: 65

LOGISTIC DATA:

Packaging method: 6
Number of units in the secondary packaging: 1
Number of units in the packaging: 6
Net unit weight [g]: 1880
Grammage [g]: 2266.67



Dustproof lighting fitting




Length of a unit pack [cm]: 128
Width of a unit pack [cm]: 13.5
Height of a unit pack [cm]: 6.5
Weight of a cardboard box [kg]: 13.60002
Width of a cardboard box [cm]: 28
Height of a cardboard box [cm]: 21.5
Length of a cardboard box [cm]: 129
Volume of a cardboard box [m³]: 0.077658

ADDITIONAL INFORMATION:

- easy installation of the light fixture using the supplied snap-on mounting brackets
- suspended mounting plate for easier connection and maintenance of the light fixture
- barrier gland for inserting a power cable


KANLUX S.A. (kat 18521) MAH PLUS-236 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 18521) MAH PLUS-236
Lampy: 2 x T26 38W/827

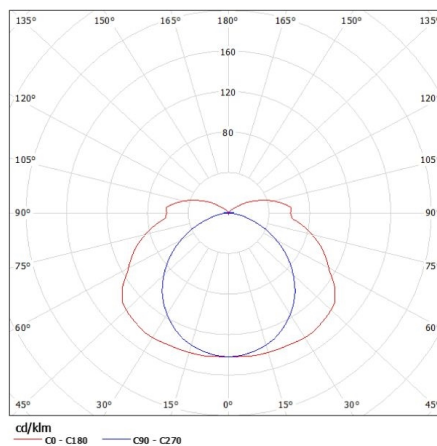

KANLUX S.A. (kat 18521) MAH PLUS-236 - T8 LED SMD / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 18521) MAH PLUS-236 - T8 LED SMD
Lampy: 2 x T8 LED SMD 18W-NW

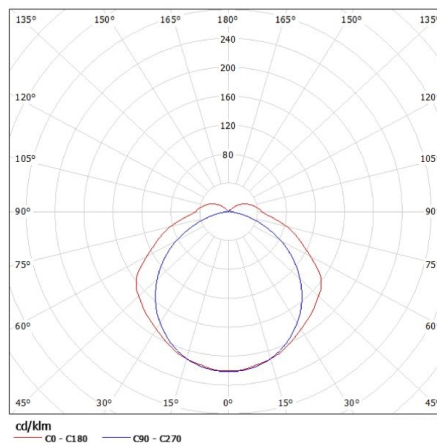

18521 MAH PLUS-236-ABS/PC

Dustproof lighting fitting

ACCESSORIES:

18593 CL-MAH PLUS

Fitting clip MAH, CL-MAH PLUS,
(18593)



18594 CL-MAH PLUS-INOX

Fitting clip MAH, CL-MAH PLUS-
INOX, (18594)



07870 ROPE-NT 150

ROPE-NT 150 steel rope (double)
for suspending fittings, 2 pcs. in
a set



07871 ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope
(single) for suspending fittings, 2
pcs. in a set

