


19066 DABA PRO 26W NW-SE-W

Ceiling-mounted LED light fitting

5905339190666

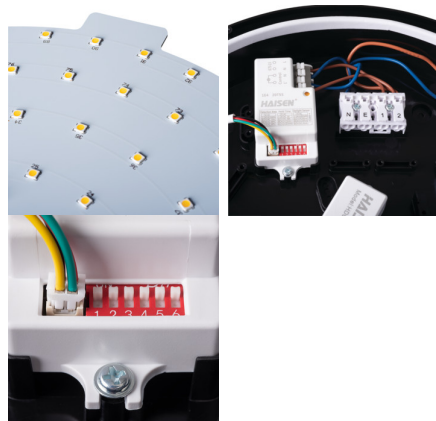

Kanlux DABA PRO are ceiling lamps for professional use. We can choose a version without a motion sensor (25W) and with a sensor (26W) and two housing colors - white and black. Kanlux DABA PRO means IP65 tightness and high resistance to weather conditions, as well as resistance to mechanical damage IK10 and additional protection of the luminaire against opening. Kanlux DABA PRO plafonds can be combined with each other on the MASTER → SLAVE principle, i.e. the first (first and last) luminaire with a sensor controls the series of luminaires. The high quality of Kanlux DABA PRO ceiling fixtures is confirmed by a 5-year warranty.

GENERAL DATA:


Colour: white
Place of assembly: wall mounted, ceiling mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Possibility of fixture-loop-through connection: yes
Compatible with a dimmer: no
Wykrywanie ruchu: yes
Height [mm]: 85
Diameter [mm]: 300
Sensitivity regulation: yes
Mercury content: no
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 26
Class of protection against electric shock: II
Lampshade material: PC
Diode type: LED SMD
Luminous flux of the light fitting [lm]: 2800
Useful luminous flux of the light source Φ_{use} [lm]: 3600
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L80B10

19066 DABA PRO 26W NW-SE-W

Ceiling-mounted LED light fitting



Number of on/off cycles: ≥ 25000

Lighting angle [°]: 115

Luminous efficiency of the lamp [lm/W]: 108

Ambient temperature range to which the product can be exposed: $-20 \div 40$

Enclosure material: plastic

Sensor type: microwave

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 0,75-2,5

Sensor-operation time [second-minute]: 5-15

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

Sensor-operation frequency [MHz]: 5800

sensor working angle [°]: 360

Illumination-level setpoint by which the sensor detects movement [lx]: off/50/10/2

IK class: 10

IP class: 65

Sensor range[m]: max 12

LOGISTIC DATA:

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 880

Grammage [g]: 1276

Length of a unit pack [cm]: 32

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 32.5

Weight of a cardboard box [kg]: 6.38

Width of a cardboard box [cm]: 34


Height of a cardboard box [cm]: 34

Length of a cardboard box [cm]: 57.5

Volume of a cardboard box [m³]: 0.06647

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

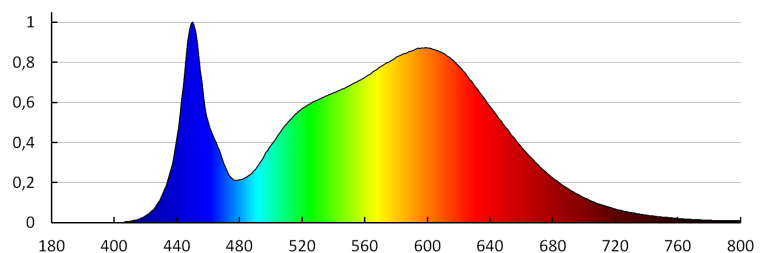

19066 DABA PRO 26W NW-SE-W

Ceiling-mounted LED light fitting

