
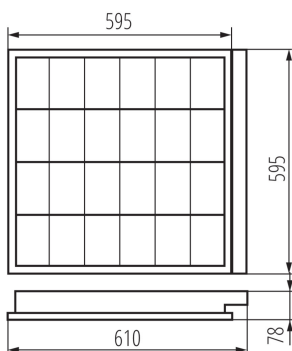


Embedded louver fitting

5905339197306



Kanlux REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Stabiliser/lamp start: cold

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 610

Width [mm]: 595

Height [mm]: 78

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 4 x 18

Class of protection against electric shock: I

Light source: T8

Light source included: no

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Reflector material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5

Stabiliser type: EVG

Stabiliser energy class: A2

IP class: 20

LOGISTIC DATA:

Packaging method: 1

Number of units in the packaging: 1

Minimum quantity for full pallet [pcs]: 50

Net unit weight [g]: 2618

Grammage [g]: 3200

Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 62.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 3.2

Date of issue: 15.11.2022, 23:28

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Embedded louver fitting


Width of a cardboard box [cm]: 63
Height of a cardboard box [cm]: 8.8
Length of a cardboard box [cm] : 65.5
Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- the casing is provided with openings for feed-through power supply
- protective conductor on the grille providing additional protection against electric shock
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, Class A2 TRIDONIC ballast
- powder coating
- half-parabolic reflector / V-shaped grille cross-bars / fluorescent lamp sockets concealed with a reflector

KANLUX S.A. (kat 19730) REGIS 3 EVG 418 PT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 19730) REGIS 3 EVG 418 PT
Lampy: 4 x T26 18W/827

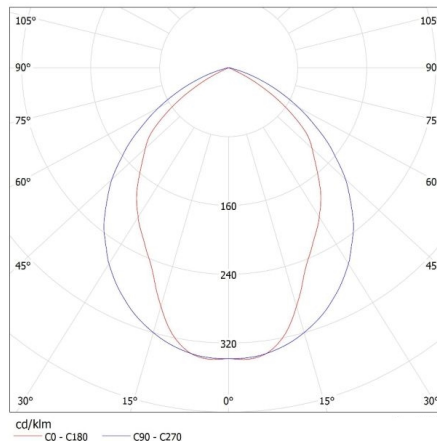

ACCESSORIES:

72333 CLP-REGIS/PT CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

