


Ceiling louver fitting

5905339197337



Kanlux NOTUS are raster facade luminaires that can be mounted quickly and easily. Raster lighting is still a very popular solution for office and industrial spaces. It is all due to good lighting parameters at a good price, simple construction and durability of the materials of which they are made.

### GENERAL DATA:

**Colour:** white  
**Place of assembly:** ceiling mounted  
**Place of application:** Indoors  
**Minimum distance from the illuminated object:** 0,5m  
**Stabiliser/lamp start:** cold  
**Length [mm]:** 615  
**Width [mm]:** 300  
**Height [mm]:** 75

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 2 x 18  
**Class of protection against electric shock:** I  
**Light source:** T8  
**Light source included:** no  
**Cap:** G13  
**Ambient temperature range to which the product can be exposed:** 5÷25  
**Enclosure material:** steel  
**Reflector material:** aluminum alloy  
**Connection type:** Self-clamping block  
**Range of sections of wires used [mm<sup>2</sup>]:** 1÷2,5  
**Stabiliser type:** EVG  
**Stabiliser energy class:** A2  
**IP class:** 20

### LOGISTIC DATA:

**Packaging method:** 1  
**Number of units in the secondary packaging:** 1  
**Number of units in the packaging:** 1  
**Minimum quantity for full pallet [pcs]:** 100  
**Net unit weight [g]:** 1864  
**Grammage [g]:** 2216  
**Length of a unit pack [cm]:** 65  
**Width of a unit pack [cm]:** 30.5  
**Height of a unit pack [cm]:** 8.5  
**Weight of a cardboard box [kg]:** 2.216

### Ceiling louver fitting




**Width of a cardboard box [cm]:** 31  
**Height of a cardboard box [cm]:** 8.8  
**Length of a cardboard box [cm] :** 65.5  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.017868

#### ADDITIONAL INFORMATION:

- half-parabolic reflector / V-shaped grille cross-bars
- fluorescent lamp sockets concealed with a reflector
- light fixtures designed for hanging on slings
- Class A2 TRIDONIC ballast
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, powder coating

KANLUX S.A. (kat 19733) NOTUS 3 EVG 218 NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 19733) NOTUS 3 EVG 218 NT  
Lampy: 2 x T26 18W/830

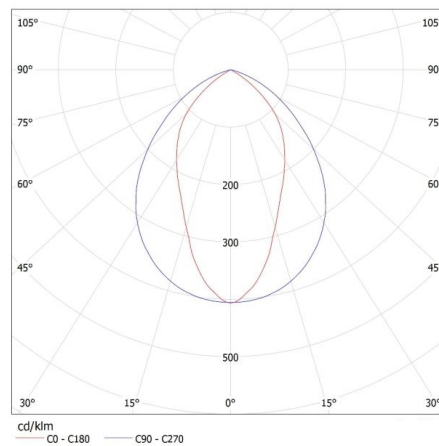

#### ACCESSORIES:

**07870** ROPE-NT 150

ROPE-NT 150 steel rope (double) for suspending fittings, 2 pcs. in a set



**07871** ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

