



Embedded louver fitting

5905339197344



EVG
BALLAST

EASY
SY installation

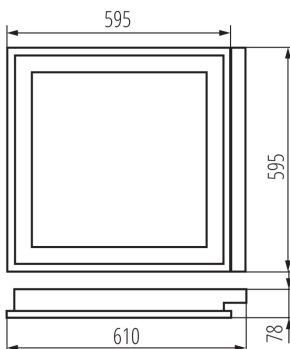

Kanlux REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Stabiliser/lamp start: cold

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 610

Width [mm]: 595

Height [mm]: 78

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 4 x 18

Class of protection against electric shock: I

Lampshade material: PMMA

Light source: T8

Light source included: no

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Reflector material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5

Stabiliser type: EVG

Stabiliser energy class: A2

IP class: 40

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2910

Grammage [g]: 3500

Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 62.5

Height of a unit pack [cm]: 8.5

Embedded louver fitting




Weight of a cardboard box [kg]: 3.5
Width of a cardboard box [cm]: 63
Height of a cardboard box [cm]: 8.8
Length of a cardboard box [cm] : 65.5
Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- half-parabolic reflector / V-shaped grille cross-bars / fluorescent lamp sockets concealed with a reflector
- the casing is provided with openings for feed-through power supply
- protective conductor on the grille providing additional protection against electric shock
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, Class A2 TRIDONIC ballast
- powder coating

KANLUX S.A. (kat 19734) REGIS 3 OPAL 418 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 19734) REGIS 3 OPAL 418
Lampy: 4 x T28 18W/827

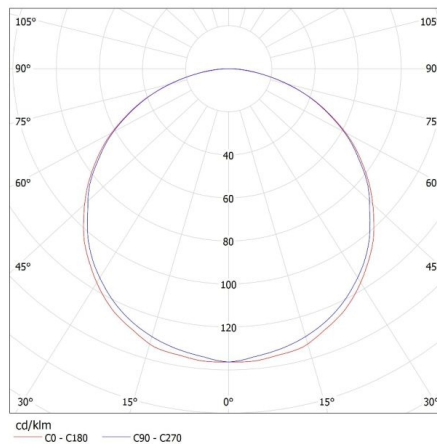

ACCESSORIES:

72333 CLP-REGIS/PT CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

