


Embedded louver fitting

5905339197368



Kanlux REGIS 4LED luminaires are traditional raster recessed luminaires adapted to T8 LED fluorescent lamps. They are manufactured in Poland of components provided by Polish suppliers. Raster lighting is still a very popular solution for office and industrial spaces.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

The product is not suitable to be covered with a heat-insulating material: yes

Power supply of T8 LED fluorescent lamps: Unilateral

Length [mm]: 625

Width [mm]: 595

Height [mm]: 78

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 4 x max 18

Class of protection against electric shock: I

Lampshade material: PMMA

Light source: T8 LED

Light source included: no

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5

IP class: 20

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2790

Grammage [g]: 3410

Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 62.5


Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 3.41

Width of a cardboard box [cm]: 63

19736 REGIS 4LED OPAL 418PT

Embedded louver fitting

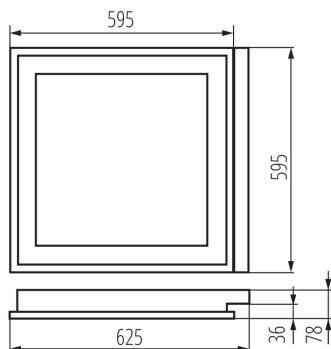


Height of a cardboard box [cm]: 8.8
Length of a cardboard box [cm] : 65.5
Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- the fittings are intended for light sources T8 LED 220-240 V ~; 50/60Hz with one-sided power supply
- fittings adapted to suspension on slings
- simple assembly of the raster on spring catches
- powder coated


KANLUX S.A. (kat 19736) REGIS 4LED OPAL 418PT + GLASSV3 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 19736) REGIS 4LED OPAL 418PT + GLASSV3
Lamps: 4 x T8 LED GLASSV3 9W-WW

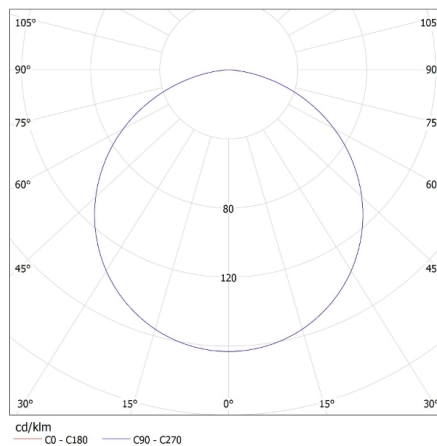

KANLUX S.A. (kat 19736) REGIS 4LED OPAL 418PT + GLASSV2 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 19736) REGIS 4LED OPAL 418PT + GLASSV2
Lamps: 4 x T8 LED GLASSV2 9W-WW

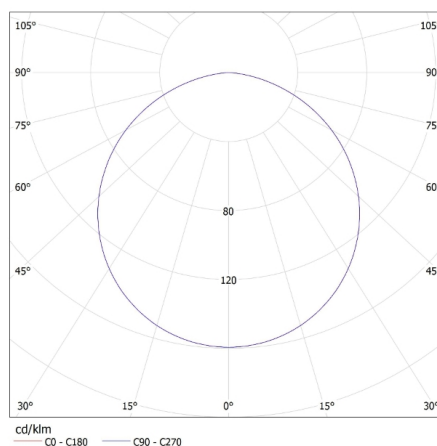


19736 REGIS 4LED OPAL 418PT

Embedded louver fitting

KANLUX S.A. (kat 19736) REGIS 4LED OPAL 418PT + Miledo / LDC (Polar)

Luminaire: KANLUX S.A. (kat 19736) REGIS 4LED OPAL 418PT + Miledo
Lamps: 4 x T8 LED N 9W-NW

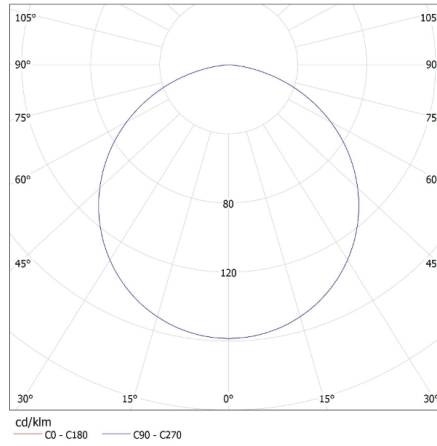

ACCESSORIES:

72333 CLP-REGIS/PT

CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

