


# **23107** APUS LED CW

Staircase LED light fitting 5905339231079






















Kanlux APUS means modern design combined with an attractive effect of lighting. It is a perfect idea to highlight stairs and corridors or to emphasize decor of rooms. The unique structure of the holders ensures even emission of light. The AC version is equipped with 230V power supply unit which fits into a box and the PIR version is equipped with a motion sensor. The sensor detects movement / turns lights on regardless of the ambient light intensity.

### **GENERAL DATA:**

To be built into the wall: yes

Colour: stainless steel

Place of assembly: Recessed mount in the wall

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Compatible with a dimmer: no

Length [mm]: 75 Width [mm]: 23 Height [mm]: 75

Required diameter of the assembly box [Ømm]: 60

Assembly-hole dimensions [mm]: 60 Integrated LED light source: yes

### **TECHNICAL DATA:**

Rated voltage [V]: 12 DC Maximum power [W]: 0.8

Class of protection against electric shock: III

Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 15

Colour temperature: cold white

Correlated colour temperature [K]: 6500 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 50000

Number of on/off cycles: ≥20000

Luminous efficiency of the lamp [lm/W]: 19

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: polished stainless steel, plastic

Connection type: Free cable ends

Wire length [m]: 0.18 Lamp-heating time [s]: ≤1 Lamp-ignition time [s]: ≤0,5

Date of issue: 05.07.2024, 11:47


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





# **23107** APUS LED CW

# Staircase LED light fitting



IP class: 20

### LOGISTIC DATA:

Unit of measurement: unit Packaging method: 100

Number of units in the secondary packaging: 1


Number of units in the packaging: 100

Net unit weight [g]: 84 Grammage [g]: 104.9 Gross unit weight [g]: 94 Length of a unit pack [cm]: 11 Width of a unit pack [cm]: 2.5 Height of a unit pack [cm]: 16.5


Weight of a cardboard box [kg]: 10.49 Width of a cardboard box [cm]: 23.5 Height of a cardboard box [cm]: 34.5 Length of a cardboard box [cm]: 63 Volume of a cardboard box [m³]: 0.051077

## **ADDITIONAL INFORMATION:**

· suitable for mounting on normally flammable surfaces

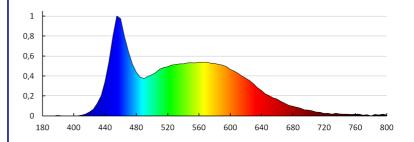

KANLUX S.A. (kat 23107) APUS LED CW / LDC (Polar)



C90 - C270

Date of issue: 05.07.2024, 11:47

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





# **23107** APUS LED CW

Staircase LED light fitting

Date of issue: 05.07.2024, 11:47

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

