


## 23169 KMB6-C50/3

Overcurrent circuit breaker, 3P

5905339231697

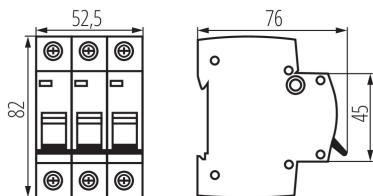

Circuit breaker with overcurrent protection is used to protect cables against overloads and short circuits in installations and devices.

### GENERAL DATA:

**Colour:** white  
**Place of assembly:** na szynę TH35  
**Norm:** PN-EN 60898-1  
**Length [mm]:** 76  
**Width [mm]:** 52.5  
**Height [mm]:** 82

### TECHNICAL DATA:

**Rated voltage [V]:** 230/400 AC  
**Rated current [A]:** 50  
**Rated frequency [Hz]:** 50  
**Ambient temperature range to which the product can be exposed:** 5÷40  
**Range of sections of wires used [mm<sup>2</sup>]:** 1÷25  
**Release characteristics:** C  
**Energy-limit class:** 3  
**Number of modules:** 3  
**Rated short-circuit current [A]:** 6000  
**IP class:** 20  
**Number of poles:** 3

### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 4  
**Number of units in the secondary packaging:** 4  
**Number of units in the packaging:** 40  
**Net unit weight [g]:** 300  
**Grammage [g]:** 330  
**Gross unit weight [g]:** 298  
**Length of a unit pack [cm]:** 5.5  
**Width of a unit pack [cm]:** 7.5  
**Height of a unit pack [cm]:** 8.5  
**Weight of a cardboard box [kg]:** 13.2  
**Width of a cardboard box [cm]:** 25  
**Height of a cardboard box [cm]:** 19.5  
**Length of a cardboard box [cm]:** 45  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.021938