


23169 KMB6-C50/3

Overcurrent circuit breaker, 3P

5905339231697

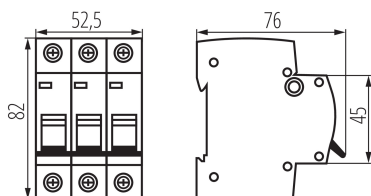

Circuit breaker with overcurrent protection is used to protect cables against overloads and short circuits in installations and devices.

GENERAL DATA:

Colour: white

Place of assembly: na szynę TH35

Norm: PN-EN 60898-1

Length [mm]: 76

Width [mm]: 52.5

Height [mm]: 82

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC

Rated current [A]: 50

Rated frequency [Hz]: 50

Ambient temperature range to which the product can be exposed: 5÷40

Range of sections of wires used [mm²]: 1÷25

Release characteristics: C

Energy-limit class: 3

Number of modules: 3

Rated short-circuit current [A]: 6000

IP class: 20

Rated insulation voltage UI [V]: 500

Number of poles: 3

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 4

Number of units in the secondary packaging: 4

Number of units in the packaging: 40

Net unit weight [g]: 300

Grammage [g]: 330

Gross unit weight [g]: 298

Length of a unit pack [cm]: 5.5

Width of a unit pack [cm]: 7.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 13.2

Width of a cardboard box [cm]: 25

Height of a cardboard box [cm]: 19.5

Length of a cardboard box [cm]: 45

23169 KMB6-C50/3

Overcurrent circuit breaker, 3P

| Volume of a cardboard box [m³] : 0.021938