


23431 DUN 6,5W T SMD E14-NW

LED light source 5905339234315











The small-size Kanlux DUN is a "candle-type" bulb with E14 screw. Durability of these light sources results from the combination of LED SMD diodes and ceramic housing. Kanlux DUN are characterised by high luminous efficiency. They are perfect for wall lamps and chandeliers in all places where we want to get a lot of light even hough its source is small.

GENERAL DATA:

Colour: white Lamp designed for decorative lighting : Not applicable Compatible with a dimmer : no Width [mm]: 37 Height [mm]: 107 Diameter [mm]: 37 Depth [mm]: 37 Mercury content : no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Lamp-power factor: 0.5 Rated power [W]: 6.5 Material: plastic Light source: C37 Diode type: LED SMD Total rated luminous flux [Im]: 600 Useful luminous flux of the light source Quse [Im] : 600 Useful luminous flux of the light source Quse [Im] : in sphere (360°) Colour temperature: white Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses : ≤6 Colour rendering index: 80 Cap: E14 Rated lamp-service life [h]: 20000 Number of on/off cycles: ≥15000 Rated beam angle [°]: 210 Rated light level [°]: 210 Lamp rated current [mA]: 54 Annual power consumption [kWh/1000h]: 7 Luminous efficiency of the lamp [lm/W]: 92 Ignition time $[s]: \le 0,5$


Date of issue: 02.11.2023, 13:09

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.



23431 DUN 6,5W T SMD E14-NW

LED light source






Lamp-heating time to 60% of the full luminous flux [s]: Negligible Lamp-heating time to 95% [s]: <2 Lamp premature-failure indicator: <5% po 1000h Lamp service life factor after the period of 6000h [%]: \geq 90 Luminous flux retention factor at the end of rated service life [%]: \geq 70 Luminous flux retention factor after the period of 6000h [%]: \geq 80

Light source shape : świeczka

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 100 Number of units in the secondary packaging: 1 Number of units in the packaging: 100 Net unit weight [g]: 46 Grammage [g]: 60.3 Length of a unit pack [cm]: 4 Width of a unit pack [cm]: 4 Height of a unit pack [cm]: 11 Weight of a cardboard box [kg]: 6.03 Width of a cardboard box [cm]: 23 Height of a cardboard box [cm]: 25 Length of a cardboard box [cm]: 42 Volume of a cardboard box [m³]: 0.02415

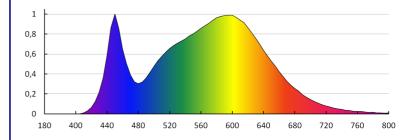





23431 DUN 6,5W T SMD E14-NW

LED light source

