


## 23452 ZONA FLAT-W

PIR motion sensor

5905339234520



Kanlux ZONA FLAT is a motion detector with maximum motion detection range of 8m. In turn, its maximum horizontal angle of work comes to 360 degrees. In the ZONA sensor, you can adjust the time of lighting from 10s to 15min as well as set the surrounding light intensity level at which the device will work.

### GENERAL DATA:

**Colour:** white  
**Place of assembly:** ceiling mounted  
**Place of application:** Indoors  
**Micro-interval between relay contacts:** yes  
**Height [mm]:** 25  
**Diameter [mm]:** 115

### TECHNICAL DATA:


**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Class of protection against electric shock:** II  
**Material:** plastic  
**Ambient temperature range to which the product can be exposed:** 5÷25  
**Sensor type:** PIR  
**Connection type:** Terminal block  
**Range of sections of wires used [mm<sup>2</sup>]:** 0,75÷1,5  
**Sensor-operation time [second-minute]:** 10-15  
**sensor working angle [°]:** H360/V120  
**Maximum operating time [min]:** 15  
**Minimum operating time[s]:** 10  
**Maximum power [VA]:** 2000  
**Illumination-level setpoint by which the sensor detects movement [lx]:** 3-2000  
**IP class:** 20  
**Sensor range[m]:** max 8

### LOGISTIC DATA:

**Packaging method:** 50  
**Number of units in the secondary packaging:** 1  
**Number of units in the packaging:** 50  
**Net unit weight [g]:** 110  
**Grammage [g]:** 158.8  
**Length of a unit pack [cm]:** 12  
**Width of a unit pack [cm]:** 3.5  
**Height of a unit pack [cm]:** 12.5  
**Weight of a cardboard box [kg]:** 7.94  
**Width of a cardboard box [cm]:** 22

## 23452 ZONA FLAT-W

PIR motion sensor

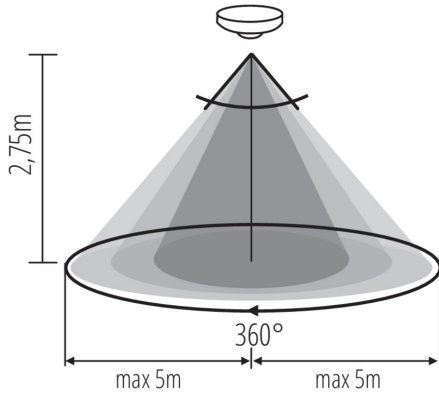

**Height of a cardboard box [cm]:** 27.5

**Length of a cardboard box [cm] :** 62.5

**Volume of a cardboard box [m<sup>3</sup>]:** 0.037813

### ADDITIONAL INFORMATION:

- Maximum movement detection up to 8m
- Maximum horizontal angle of operation of the motion sensor - 360°
- Light on time adjustable from 10s to 15min
- Capability to set the light intensity of the environment in which the device works
- Motion detection 0.6...1.5m/s
- Maximum vertical angle of operation of the motion sensor 120°