


## 23611 KDB-S08T

KDB-series distribution board

5905339236111

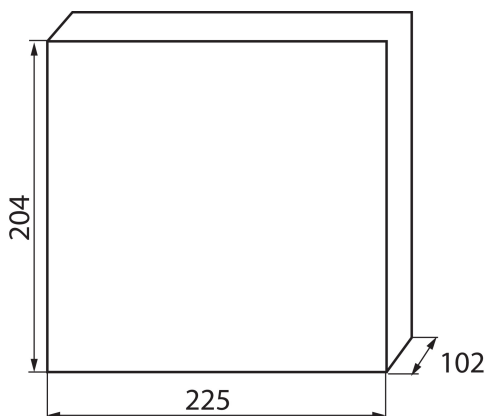

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

### GENERAL DATA:

**Colour:** white / blue

**Door colour:** blue

**Place of assembly:** wall mounted

**Norm:** PN-EN 62208

**Length [mm]:** 225

**Width [mm]:** 102

**Height [mm]:** 204

### TECHNICAL DATA:

**Rated voltage [V]:** 230/400 AC

**Rated current [A]:** 63

**Rated frequency [Hz]:** 50

**Class of protection against electric shock:** II

**Material:** plastic

**Number of modules:** 8P

**Temperature resistance [°C]:** 650

**IK class:** 07

**IP class:** 30

**number of rows:** 1

**Ilość zacisków N/PE:** 6+4

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 20

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 20

**Net unit weight [g]:** 540

**Grammage [g]:** 758

**Gross unit weight [g]:** 672

**Length of a unit pack [cm]:** 21

**Width of a unit pack [cm]:** 10.5

**Height of a unit pack [cm]:** 23.5

## 23611 KDB-S08T

---

KDB-series distribution board

**Weight of a cardboard box [kg]:** 15.16

**Width of a cardboard box [cm]:** 45

**Height of a cardboard box [cm]:** 49

**Length of a cardboard box [cm]:** 55.5

**Volume of a cardboard box [m<sup>3</sup>]:** 0.122378