


## 23620 KDB-F24T

KDB-series distribution board

5905339236203

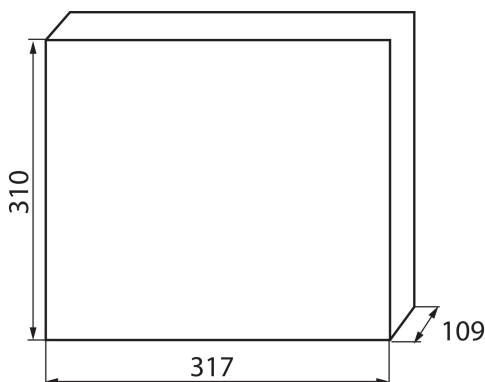

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

### GENERAL DATA:

**Colour:** white / blue

**Door colour:** blue

**Place of assembly:** Recessed mount in the wall

**Norm:** PN-EN 62208

**Length [mm]:** 317

**Width [mm]:** 109

**Height [mm]:** 310

### TECHNICAL DATA:

**Rated voltage [V]:** 230/400 AC

**Rated current [A]:** 63

**Rated frequency [Hz]:** 50

**Class of protection against electric shock:** II

**Material:** plastic

**Number of modules:** 2x12P

**Temperature resistance [°C]:** 650

**IK class:** 07

**IP class:** 30

**number of rows:** 2

**Ilość zacisków N/PE:** (6+6+4)x2

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 5

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 5

**Net unit weight [g]:** 1230

**Grammage [g]:** 1658

**Gross unit weight [g]:** 1582

**Length of a unit pack [cm]:** 33

**Width of a unit pack [cm]:** 11.5

**Height of a unit pack [cm]:** 32

## 23620 KDB-F24T

---

KDB-series distribution board

**Weight of a cardboard box [kg] :** 8.29

**Width of a cardboard box [cm] :** 33

**Height of a cardboard box [cm] :** 33

**Length of a cardboard box [cm] :** 59.5

**Volume of a cardboard box [m³] :** 0.064796