

23800 APUS LED AC-WW


Staircase LED light fitting 5905339238009








APUS LED AC















Kanlux APUS means modern design combined with an attractive effect of lighting. It is a perfect idea to highlight stairs and corridors or to emphasize decor of rooms. The unique structure of the holders ensures even emission of light. The AC version is equipped with 230V power supply unit which fits into a box and the PIR version is equipped with a motion sensor. The sensor detects movement / turns lights on regardless of the ambient light intensity.

GENERAL DATA:

To be built into the wall: yes

Colour: stainless steel

Place of assembly: Recessed mount in the wall

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Compatible with a dimmer: no

Feeder included: yes Length [mm]: 75 Width [mm]: 23 Height [mm]: 75

Required diameter of the assembly box [Ømm]: 60

Assembly-hole dimensions [mm]: 60 Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 1.3

Class of protection against electric shock: ||

Diode type: LED SMD **Luminous flux [lm]**: 13

Colour temperature: Warm white

Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 50000

Number of on/off cycles: ≥20000

Luminous efficiency of the lamp [lm/W]: 10

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: polished stainless steel, plastic

Connection type: Free cable ends

Wire length [m]: 0.18 Lamp-heating time [s]: ≤1

Date of issue: 12.04.2023, 10:26


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





23800 APUS LED AC-WW

Staircase LED light fitting



Lamp-ignition time [s]: ≤ 0.5

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 100

Number of units in the secondary packaging: 1

Number of units in the packaging: 100

Net unit weight [g]: 120 Grammage [g]: 124.9


Length of a unit pack [cm]: 11
Width of a unit pack [cm]: 2.5
Height of a unit pack [cm]: 16.5


Weight of a cardboard box [kg]: 12.49
Width of a cardboard box [cm]: 34.5
Height of a cardboard box [cm]: 34.5
Length of a cardboard box [cm]: 63

Volume of a cardboard box [m³]: 0.074986

ADDITIONAL INFORMATION:

- the fitting is suitable for mounting in \varnothing 60 junction boxes.
- fitting delivered with a power supply unit fit for Ø 60 junction box, enabling powering from grids with voltage of 220-240 V

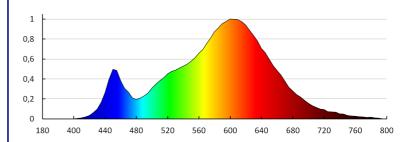




We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





23800 APUS LED AC-WW

Staircase LED light fitting



Date of issue: 12.04.2023, 10:26

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

