
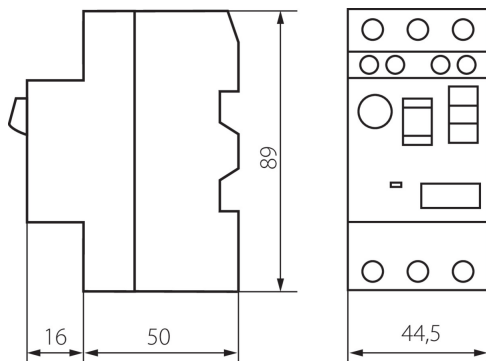


24066 KMP-2,5

KMP motor protection switch

5905339240668

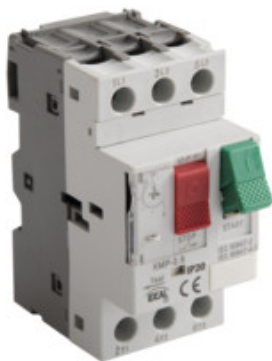

Motor circuit breaker is used for protect three-phase motor circuits. We have accessories adjusted to the breakers - auxiliary contacts, triggers and tight housing.

GENERAL DATA:

Utilisation category: AC-3

Colour: white

Place of assembly: rail TH35

Norm: PN-EN 60947-4-1

TECHNICAL DATA:

Connection type: Terminal block

Rated breaking voltage U_e [V]: 400

Thermal-power I_{the} [A]: 2.5

IP class: 20

Instantaneous release [A]: 33.5

Overcurrent-release setpoint range [A]: 1,6-2,5

3-phase rated power - 230/240V [kW]: 0.37

3-phase rated power - 400 V [kW]: 0.75

3-phase rated power - 440 V [kW]: 0.75

3-phase rated power - 500 V [kW]: 1.1

3-phase rated power - 690 V [kW]: 1.5

Rated insulation voltage U_i [V]: 690

Rated impulse withstand voltage U_{imp} [V]: 6000

LOGISTIC DATA:

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 260

Grammage [g]: 281.4

Length of a unit pack [cm]: 9

Width of a unit pack [cm]: 4.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 14.07

Width of a cardboard box [cm]: 25.5

Height of a cardboard box [cm]: 18

Length of a cardboard box [cm]: 47

Volume of a cardboard box [m³]: 0.021573

24066 KMP-2,5

KMP motor protection switch