

# 24525 ZUBI LED 3,5W E14-WW

# LED light source 5905339245250
















Kanlux ZUBI LED are energy-saving LED light sources. High luminous flux of 520lm and small size allow this source to be used in many luminaires. The construction of Kanlux ZUBI sources guarantees a wide lighting angle, thanks to which it is ideal for use in all open luminaires and chandeliers.

### GENERAL DATA:

Colour: white Lamp designed for decorative lighting: Not applicable Compatible with a dimmer: no Width [mm]: 17 Height [mm]: 52 Diameter [mm]: 17 Depth [mm]: 17 Mercury content: no

#### TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Lamp-power factor: 0.4 Rated power [W]: 3.5 Material: plastic Lampshade material: plastic Diode type: LED SMD Total rated luminous flux [Im]: 300 Useful luminous flux of the light source Quse [Im]: 300 Useful luminous flux of the light source Quse [Im] : in sphere (360°) Colour temperature: Warm white Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses : ≤6 Colour rendering index: 80 Cap: E14 Rated lamp-service life [h]: 15000 Number of on/off cycles: ≥10000 Rated beam angle [°]: 300 Rated light level [°]: 300 Lamp rated current [mA]: 32 Annual power consumption [kWh/1000h]: 4 Luminous efficiency of the lamp [lm/W]: 86 Ignition time  $[s]: \le 0.5$ Lamp-heating time to 60% of the full luminous flux [s] : Negligible

Date of issue: 07.08.2023, 11:02


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





### 24525 ZUBI LED 3,5W E14-WW

### LED light source

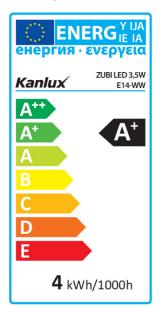




Lamp-heating time to 95% [s]: <2 Lamp premature-failure indicator : <5% po 1000h Lamp service life factor after the period of 6000h [%] :  $\geq$ 90 Luminous flux retention factor at the end of rated service life [%]:  $\geq$ 70 Luminous flux retention factor after the period of 6000h [%] :  $\geq$ 80 Declaration of equality in power rating [W] : 28 Light source shape : kapsułka

### LOGISTIC DATA:

Packaging method: 10 Number of units in the secondary packaging: 10 Number of units in the packaging: 100 Net unit weight [g]: 14 Grammage [g]: 50.6 Length of a unit pack [cm]: 11.5 Width of a unit pack [cm]: 2.5 Height of a unit pack [cm]: 16.5 Weight of a cardboard box [kg]: 5.06 Width of a cardboard box [kg]: 5.06 Width of a cardboard box [cm]: 36 Height of a cardboard box [cm]: 20.5 Length of a cardboard box [cm]: 64 Volume of a cardboard box [m<sup>3</sup>]: 0.047232

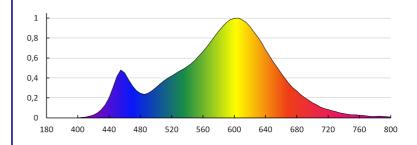

Date of issue: 07.08.2023, 11:02 We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





# 24525 ZUBI LED 3,5W E14-WW

LED light source

