


24532 LEDS-B 7.2W/M IP54RGB

LED tape

5905339245328

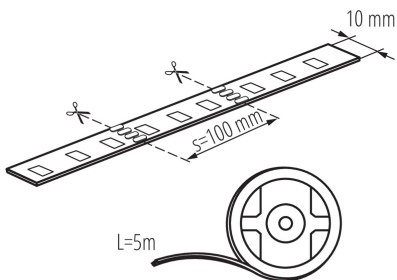

Kanlux LEDS-B RGB are modern strips of decorative character. Perfect for home use where they can create unique arrangements limited by our imagination only. They are characterised by high flexibility, good adhesion and high durability. Depending on the place in which we want to add more light or which we wish to highlight, we can choose the lighting colour suiting our preferences.

GENERAL DATA:

Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,1m
Length [mm]: 5000
Width [mm]: 10
Height [mm]: 5000
Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 12 DC
Rated power [W]: 1m = 7,2
Class of protection against electric shock: III
Diode type: LED SMD
Luminous flux [lm]: 1m = 130
Useful luminous flux of the light source Φ_{use} [lm]: 0,5m = 65
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: RGB
Correlated colour temperature [K]: RGB
Rated lamp-service life [h]: 15000
Number of on/off cycles: ≥ 15000
Ambient temperature range to which the product can be exposed: 5÷25
Connection type: Free cable ends
IP class: 54


LOGISTIC DATA:

Packaging method: 25
Number of units in the secondary packaging: 25
Number of units in the packaging: 50
Net unit weight [g]: 148
Grammage [g]: 240
Length of a unit pack [cm]: 20.5
Width of a unit pack [cm]: 1
Height of a unit pack [cm]: 22.5

LED tape



Weight of a cardboard box [kg]: 12
Width of a cardboard box [cm]: 32.5
Height of a cardboard box [cm]: 28.5
Length of a cardboard box [cm] : 51
Volume of a cardboard box [m³]: 0.047239

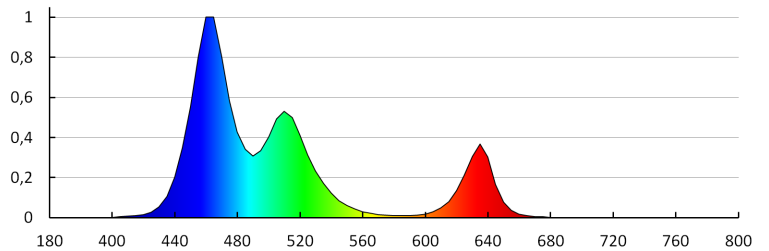

ACCESSORIES:

19036 CONNECTOR RGB 10-CP LED band connector,
CONNECTOR RGB 10-CP
(19036)



19037 CONNECTOR RGB 10-CPC LED band connector,
CONNECTOR RGB 10-CPC
(19037)



19038 CONNECTOR RGB 10 LED band connector,
CONNECTOR RGB 10
(19038)



22140 CONTROLLER LED RGB-RF Controller RGB + remote
control, CONTROLLER LED
RGB-RF (22140)

