

## **24643** TYBIA LED 38W-NW-SE B

## Ceiling-mounted LED light fitting

5905339246431
















Kanlux TYBIA LED is a general lighting luminaire using SMD diodes. When mounted in corridors, staircases, social or utility rooms, TYBIA LED allows for significant savings related to both reduced energy consumption and the long-term maintenance-free operation.

#### **GENERAL DATA:**

Colour: black

Place of assembly: ceiling mounted Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: yes Length [mm]: 410 Width [mm]: 410 Height [mm]: 61 Mercury content: no

**Integrated LED light source**: yes

### TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 38

Class of protection against electric shock: |

Lampshade material: PMMA

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3800

Useful luminous flux of the light source **Quse** [lm]: 5700 Useful luminous flux of the light source **Quse** [lm]: in

sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 30000

Luminous-flux-retention factor at the end of rated

service life: L70B50

Number of on/off cycles: ≥20000

Lighting angle [°]: 110

Luminous efficiency of the lamp [lm/W]: 100

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy

Sensor type: microwave

Connection type: Self-clamping block

Date of issue: 16.11.2022, 09:04

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





# **24643** TYBIA LED 38W-NW-SE B

## Ceiling-mounted LED light fitting



Range of sections of wires used [mm<sup>2</sup>]: 1-2,5

Lamp-heating time [s]:  $\leq 1$ Lamp-ignition time [s]:  $\leq 0.5$ 

IP class: 20

### LOGISTIC DATA:

Packaging method: 6

Number of units in the secondary packaging: 1

Number of units in the packaging: 6


Net unit weight [g]: 2084 Grammage [g]: 2550

Length of a unit pack [cm]: 42 Width of a unit pack [cm]: 42 Height of a unit pack [cm]: 7.5

Weight of a cardboard box [kg]: 15.3 Width of a cardboard box [cm]: 43 Height of a cardboard box [cm]: 44 Length of a cardboard box [cm]: 48 Volume of a cardboard box [m³]: 0.090816


#### **ADDITIONAL INFORMATION:**

• 5 years Warranty under the terms of the warranty statement, available on our website

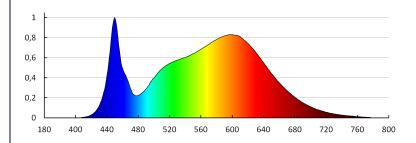

KANLUX S.A. (kat 24643) TYBIA LED 38W-NW-SE B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 24643) TYBIA LED 38W-NW-SE B Lamps: 1 x TYBIA LED 38W-NW





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

