

24646 TYBIA M 25W-NW-SE GY

Ceiling-mounted LED light fitting

5905339246462






















Kanlux TYBIA LED is a general lighting luminaire using SMD diodes. When mounted in corridors, staircases, social or utility rooms, TYBIA LED allows for significant savings related to both reduced energy consumption and the long-term maintenance-free operation.

GENERAL DATA:

Colour: grey

Place of assembly: ceiling mounted Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: yes Replaceable light source: no

Length [mm]: 320 Width [mm]: 320 Height [mm]: 61 Mercury content: no

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 25

Class of protection against electric shock: |

Lampshade material: PMMA

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 2600

Useful luminous flux of the light source Φ use [lm]: 3850 Useful luminous flux of the light source Φ use [lm]: in

sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 30000

Luminous-flux-retention factor at the end of rated

service life: L70B50

Number of on/off cycles: ≥15000

Lighting angle [°]: 110

Luminous efficiency of the lamp [lm/W]: 104

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy

Sensor type: microwave

Date of issue: 16.11.2022, 09:10

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





24646 TYBIA M 25W-NW-SE GY

Ceiling-mounted LED light fitting



Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1-2,5

Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤ 0.5

IP class: 20

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 1

Number of units in the packaging: 10


Net unit weight [g]: 1512 Grammage [g]: 1816

Length of a unit pack [cm]: 33 Width of a unit pack [cm]: 33 Height of a unit pack [cm]: 7.5

Weight of a cardboard box [kg]: 18.16 Width of a cardboard box [cm]: 35 Height of a cardboard box [cm]: 35 Length of a cardboard box [cm]: 77 Volume of a cardboard box [m³]: 0.094325

ADDITIONAL INFORMATION:

• 5 years Warranty under the terms of the warranty statement, available on our website

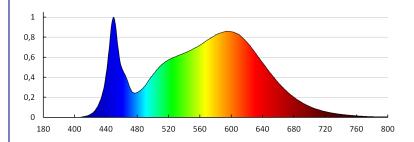





24646 TYBIA M 25W-NW-SE GY

Ceiling-mounted LED light fitting

