


## 25193 LOGI 02-1070-143 sr

Cross connector

5905339251930

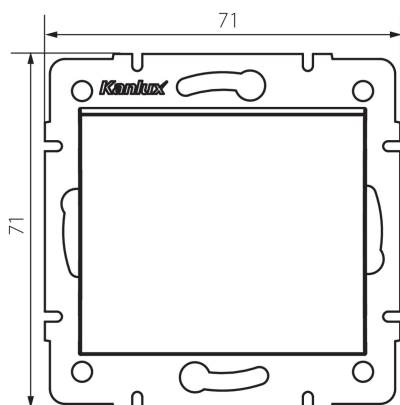

A crossbar switch is used for cooperation with single-pole double-throw switches in order to control the circuit of a lamp or a group of lamps from more than two places. A crossbar switch is installed between single-pole double-throw switches.

### GENERAL DATA:

**Colour:** silver

**Place of assembly:** Recessed mount in the wall

**Highlighting:** no

**Width [mm]:** 71

**Height [mm]:** 71

**Diameter of an installation box:** 60

**Installation depth:** 25

### TECHNICAL DATA:

**Rated voltage [V]:** 250 AC

**Material of contacts:** CuZn70

**Terminal type:** Screw terminal

**Plastic:** ABS

**Number of levers:** 1

**Rated current [AX]:** 10

**IP class:** 20

### LOGISTIC DATA:

**Packaging method:** 10

**Number of units in the secondary packaging:** 10

**Number of units in the packaging:** 120

**Net unit weight [g]:** 74

**Gammage [g]:** 86

**Length of a unit pack [cm]:** 10

**Width of a unit pack [cm]:** 4

**Height of a unit pack [cm]:** 14

**Weight of a cardboard box [kg]:** 10.32

**Width of a cardboard box [cm]:** 25.5

**Height of a cardboard box [cm]:** 32

**Length of a cardboard box [cm]:** 44

## 25193 LOGI 02-1070-143 sr

---

Cross connector

Volume of a cardboard box [m<sup>3</sup>]: 0.035904