



Embedded louver fitting

5905339257109



**EVG**  
BALLAST

**EASY**  
SY installation

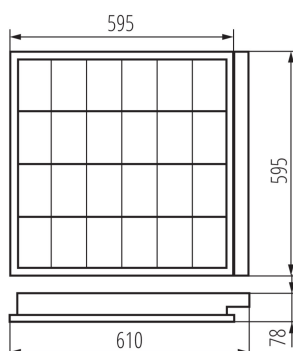

Kanlux REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Stabiliser/lamp start:** warm

**The product is not suitable to be covered with a heat-insulating material:** yes

**Length [mm]:** 610

**Width [mm]:** 595

**Height [mm]:** 78

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 4 x 18

**Class of protection against electric shock:** I

**Light source:** T8

**Light source included:** no

**Cap:** G13

**Ambient temperature range to which the product can be exposed:** 5÷25

**Enclosure material:** steel

**Reflector material:** aluminum alloy

**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 1÷2,5

**Stabiliser type:** EVG

**Stabiliser energy class:** A2

**IP class:** 20

### LOGISTIC DATA:

**Packaging method:** 1

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 1

**Net unit weight [g]:** 2730

**Grammage [g]:** 3340

**Length of a unit pack [cm]:** 65

**Width of a unit pack [cm]:** 62.5

**Height of a unit pack [cm]:** 8.5

**Weight of a cardboard box [kg]:** 3.34

Date of issue: 15.11.2022, 23:29

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Embedded louver fitting


**Width of a cardboard box [cm]:** 63  
**Height of a cardboard box [cm]:** 8.8  
**Length of a cardboard box [cm] :** 65.5  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.036313

### ADDITIONAL INFORMATION:

- reflector in the shape of a half-parabola / raster crossbars in the shape of "V" / sockets of fluorescent lamps masked with a reflector (exception: version REGIS 3 OPAL, REGIS 3WS OPAL with an opal board)
- the casing contains openings facilitating straight through type power supply
- protective cable on a raster, additionally securing against electric shock, except the version REGIS 3 OPAL, REGIS 3WS OPAL.
- simple assembly of the raster on spring catches
- quick coupling, for connection of power supply, facilitates and accelerates assembly, stabilizer by OSRAM in A2 class
- powder coating
- REGIS 3WS equipped with a stabilizer with "warm start".

KANLUX S.A. (kat 25710) REGIS 3WS EVG 418 PT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25710) REGIS 3WS EVG 418 PT  
Lampy: 4 x T25 18W/827

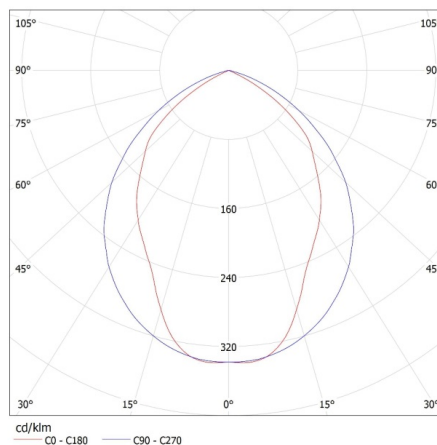

### ACCESSORIES:

**72333** CLP-REGIS/PT CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

