


Ceiling louver fitting

5905339257116



EVG
BALLAST

EASY
Installation



Kanlux NOTUS are raster facade luminaires that can be mounted quickly and easily. Raster lighting is still a very popular solution for office and industrial spaces. It is all due to good lighting parameters at a good price, simple construction and durability of the materials of which they are made.

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Stabiliser/lamp start: warm

Length [mm]: 615

Width [mm]: 615

Height [mm]: 75

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 4 x 18

Class of protection against electric shock: I

Light source: T8

Light source included: no

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Reflector material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5

Stabiliser type: EVG

Stabiliser energy class: A2

IP class: 20

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2420

Grammage [g]: 3030


Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 62.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 3.03

Width of a cardboard box [cm]: 63

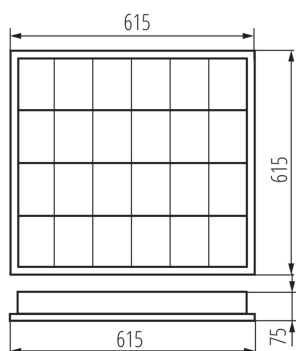

25711 NOTUS 3WS EVG 418 NT

Ceiling louver fitting




Height of a cardboard box [cm]: 8.8
Length of a cardboard box [cm] : 65.5
Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- half-parabolic reflector / V-shaped grille cross-bars
- fluorescent lamp sockets concealed with a reflector
- light fixtures designed for hanging on slings
- Class A2 OSRAM ballast
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, powder coating
- NOTUS 3WS equipped with a "warm start" ballast

KANLUX S.A. (kat 25711) NOTUS 3WS EVG 418 NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25711) NOTUS 3WS EVG 418 NT
Lampy: 4 x T26 18W/827

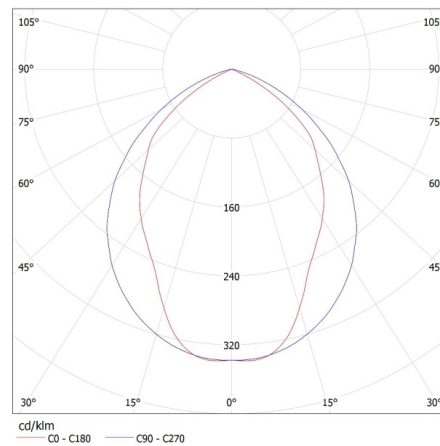

ACCESSORIES:

07870 ROPE-NT 150

ROPE-NT 150 steel rope (double) for suspending fittings, 2 pcs. in a set



07871 ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

