

26063 T8 LED GLASSv3 9W-CW

LED light source

5905339260635



up to
150 $\frac{\text{lm}}{\text{W}}$



T8 LED GLASSv3 9W



The Kanlux T8 LED GLASS is a well-known and proven line of fluorescent lamps utilising high-performance SMD LED's in a milky-coloured glass body. The high quality of workmanship and the care taken over choosing the best-quality components are the most-important features of the T8 LED GLASSv3.

GENERAL DATA:

Colour: white

Lamp designed for decorative lighting : no

Compatible with a dimmer : no

Power supply of T8 LED fluorescent lamps : Unilateral

Width [mm]: 28

Height [mm]: 600

Diameter [mm]: 28

Depth [mm]: 28

Mercury content: no

Mercury content in the lamp [mg] : 0

Replacement LED light switch : not included

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Lamp-power factor: 0.5

Rated power [W]: 9

Lampshade material: glass

Light source: T8 LED

Diode type: LED SMD

Total rated luminous flux [lm] : 1350

Useful luminous flux of the light source Φ_{use} [lm] : 1350

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: cold white

Correlated colour temperature [K] : 6500

Colour consistency in McAdam ellipses : 6

Colour rendering index: 80

Cap (Light source): G13



Rated lamp-service life [h] : 30000

Number of on/off cycles: ≥ 25000

Rated beam angle [°] : 220

26063 T8 LED GLASSv3 9W-CW

LED light source

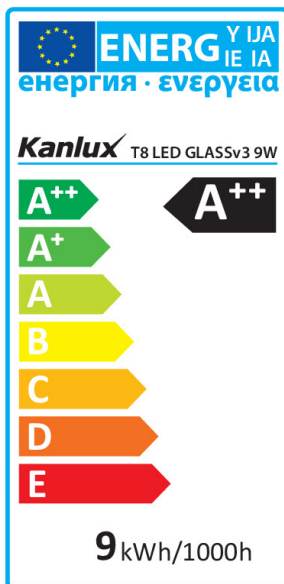

Rated light level [°]: 250

Lamp rated current [mA]: 67

Annual power consumption [kWh/1000h]: 9

Luminous efficiency of the lamp [lm/W]: 150

Ignition time [s]: ≤0,5

Lamp-heating time to 60% of the full luminous flux [s]:

Negligible

Lamp-heating time to 95% [s]: <2

Lamp premature-failure indicator: <5% po 1000h

Ambient temperature range to which the product can be exposed: -10÷40

Lamp service life factor after the period of 6000h [%]: ≥90

Luminous flux retention factor at the end of rated service life [%]: ≥70

Luminous flux retention factor after the period of 6000h [%]: ≥80

Kształt: linear

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 25

Number of units in the secondary packaging: 1

Number of units in the packaging: 25

Net unit weight [g]: 116

Grammage [g]: 166

Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 3

Height of a unit pack [cm]: 3

Weight of a cardboard box [kg]: 4.15

Width of a cardboard box [cm]: 19.5

Height of a cardboard box [cm]: 19

Length of a cardboard box [cm]: 69



Volume of a cardboard box [m³]: 0.025565

ADDITIONAL INFORMATION:

- One-way fluorescent LED-power supply
- 3 years Warranty under the terms of the warranty statement, available on our website


26063 T8 LED GLASSv3 9W-CW

LED light source

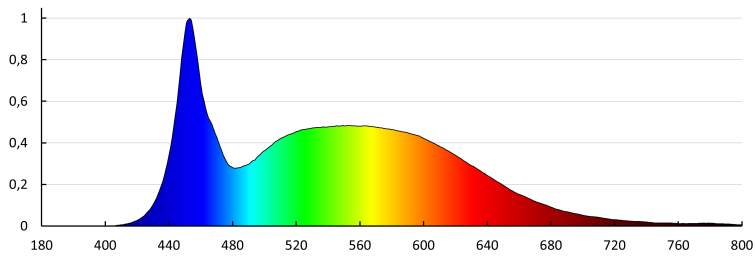

KANLUX S.A. (kat 26063) T8 LED GLASSv3 9W-CW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 26063) T8 LED GLASSv3 9W-CW
Lamps: 1 x T8 LED GLASSv3 9W-CW

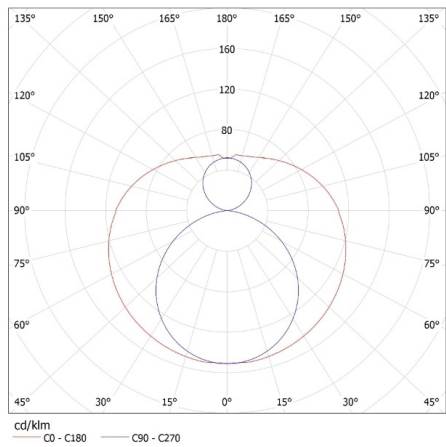

ACCESSORIES

26069

T8 LED STARTER

Replacement LED light switch (26069)

