

26444 VARSO LED 24W-WW-O

Ceiling-mounted LED light fitting

5905339264442


























Kanlux VARSO LED is a family of hermetic ceiling light fixtures with an integrated LED light source. It is a great choice both for developments (housing co-operatives, hotels) and individual households where increased resistance to humidity (IP54) is needed. For lighting particularly large spaces, we recommend 36W Kanlux VARSO HI with a luminous flux up to 3600 lm. Keep in mind that we also offer Kanlux VARSO fixtures with motion sensors (SE).

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted
Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Height [mm]: 49 Diameter [mm]: 327 Mercury content: no

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 24

Class of protection against electric shock: ||

Lampshade material: plastic **Diode type**: LED SMD

Luminous flux of the light fitting [lm]: 2160

Useful luminous flux of the light source Φ use [lm]: 2700 Useful luminous flux of the light source Φ use [lm]: in

sphere (360°)

Colour temperature: Warm white

Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 20000

Luminous-flux-retention factor at the end of rated

service life: L70B50

Number of on/off cycles: ≥20000

Lighting angle [°]: 120

Luminous efficiency of the lamp [lm/W]: 90

Ambient temperature range to which the product can be

exposed: -20÷35

Enclosure material: plastic

Date of issue: 16.11.2022, 00:17

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





26444 VARSO LED 24W-WW-O

Ceiling-mounted LED light fitting



Connection type: Self-clamping block

Range of sections of wires used [mm²]: 0,5-2,5

Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤ 0.5

IP class: 54

LOGISTIC DATA:


Packaging method: 10

Number of units in the secondary packaging: 1

Number of units in the packaging: 10 Number of units per layer on a pallet: 40


Net unit weight [g]: 900 Grammage [g]: 1178


Length of a unit pack [cm]: 33.5
Width of a unit pack [cm]: 5.5
Height of a unit pack [cm]: 33.5
Weight of a cardboard box [kg]: 11.78
Width of a cardboard box [cm]: 35
Height of a cardboard box [cm]: 36.5
Length of a cardboard box [cm]: 57
Volume of a cardboard box [m³]: 0.072818

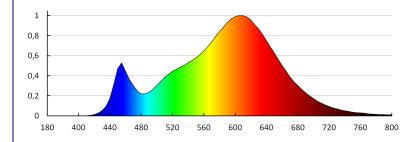

KANLUX S.A. (kat 26444) VARSO LED 24W-WW-O / Krzywa rozsyłu światła (biegunowo)







We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

