


26480 MERIL DLP-50-W

Ceiling-mounted spotlight fitting

5905339264800



MERIL DLP-50-W

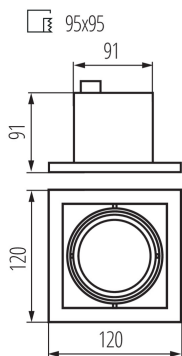

Kanlux MERIL are holders of downlight type with a replaceable source of light. The holders are available in one-spot beam and two-spot beam version and their significant feature is a possibility of free adjustment of the angle.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 120

Width [mm]: 120

Height [mm]: 90

Assembly hole [mm]: 95x95

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Maximum power [W]: max 10

Class of protection against electric shock: I

Light source: PAR16

Light source included: no

Cap: GU10

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1÷2,5

Lighting-fixture angle regulation: in two axes

Lighting-fixture angle regulation [°]: 30/30

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 420

Grammage [g]: 528.5

Length of a unit pack [cm]: 12.5

Width of a unit pack [cm]: 12.5

Height of a unit pack [cm]: 13.5

26480 MERIL DLP-50-W

Ceiling-mounted spotlight fitting



Weight of a cardboard box [kg]: 10.57

Width of a cardboard box [cm]: 27

Height of a cardboard box [cm]: 28.5

Length of a cardboard box [cm]: 66

Volume of a cardboard box [m³]: 0.050787