


Downlight fitting

5905339266163

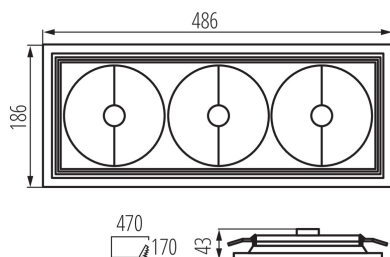

Kanlux ARTO luminaires are designed for AR111 light sources. The luminaire is discrete, has a simple design and allows for adjusting the angle of light incidence.

GENERAL DATA:

Colour: silver

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 1m

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 486

Width [mm]: 186

Height [mm]: 43

Assembly hole [mm]: 470x170

TECHNICAL DATA:

Rated voltage [V]: 12 AC; 12 DC

Maximum power [W]: 3 x max 35

Class of protection against electric shock: III

Light source: AR-111

Light source included: no

Cap: G53

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Connection type: Free cable ends

Lighting-fixture angle regulation: in two axes

Lighting-fixture angle regulation [°]: 15/15

IP class: 20

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 700

Grammage [g]: 906

Length of a unit pack [cm]: 49

Width of a unit pack [cm]: 4.5

Height of a unit pack [cm]: 20

Weight of a cardboard box [kg]: 18.12

Width of a cardboard box [cm]: 49

Height of a cardboard box [cm]: 42.5

Length of a cardboard box [cm]: 51

Volume of a cardboard box [m³]: 0.106208

Downlight fitting

