

LED wall mounted fitting

5905339266811









Kanlux ASTEN LED is a linear wall luminaire to be used in places with increased humidity (IP44). You can easily mount it above the bathroom mirror. The lamp has a built-in light source based on SMD LED diodes, which lifetime is at least 25,000 hours.

GENERAL DATA:

Colour: chrome Place of assembly: wall mounted Place of application: Indoors Minimum distance from the illuminated object: 0,1m Compatible with a dimmer: no Fixture lighting direction: down Length [mm]: 600 Width [mm]: 110 Height [mm]: 42 Mercury content: no Integrated LED light source: yes


TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 12 Class of protection against electric shock: II Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 1010 Useful luminous flux of the light source **Quse** [Im]: 1450 Colour temperature: white Correlated colour temperature [K]: 4000 **Colour consistency in McAdam ellipses**: ≤6 Colour rendering index: 80 Service life [h]: 25000 Number of on/off cycles: ≥15000 Lighting angle [°]: X120/Y105 Luminous efficiency of the lamp [lm/W]: 84 Ambient temperature range to which the product can be exposed: 5÷30 Luminous flux retention factor at the end of rated service life [%]: L70B50 **Enclosure material**: aluminum alloy Connection type: Bolt terminal block Range of sections of wires used [mm²]: 0,75÷1,5 Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: $\leq 0,5$





LED wall mounted fitting






IP class: 44

LOGISTIC DATA:

Packaging method: 20 Number of units in the secondary packaging: 1 Number of units in the packaging: 20 Net unit weight [g]: 290 Grammage [g]: 502.5 Length of a unit pack [cm]: 13 Width of a unit pack [cm]: 5 Height of a unit pack [cm]: 61 Weight of a cardboard box [kg]: 10.05 Width of a cardboard box [cm]: 54 Height of a cardboard box [cm]: 54 Height of a cardboard box [cm]: 27 Length of a cardboard box [cm]: 64 Volume of a cardboard box [m³]: 0.093312

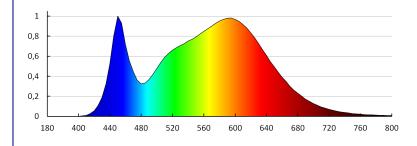

KANLUX S.A. (kat 26681) ASTEN LED IP44 12W-NW / LDC (Polar)

