


26688 ASTEN IP44 15W-NW-W

LED wall mounted fitting 5905339266880







CE ERI EK 🛞

Kanlux ASTEN LED is a linear wall luminaire to be used in places with increased humidity (IP44). You can easily mount it above the bathroom mirror. The lamp has a built-in light source based on SMD LED diodes, which lifetime is at least 25,000 hours.

GENERAL DATA:

Colour: white Place of assembly: wall mounted Place of application: Indoors Minimum distance from the illuminated object: 0,1m Compatible with a dimmer: no Fixture lighting direction: down Length [mm]: 900 Width [mm]: 110 Height [mm]: 42 Mercury content: no Mercury content in the lamp [mg]: 0 Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 15 Class of protection against electric shock : II Lampshade material: plastic Enclosure material: aluminum alloy Diode type: LED SMD Luminous flux [lm]: 1450 Useful luminous flux of the light source Quse [Im]: 1900 Useful luminous flux of the light source **Quse** [Im] : in sphere (360°) Colour temperature: white Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses : ≤6 Colour rendering index: 80 Service life [h]: 25000 Number of on/off cycles: ≥15000 Lighting angle [°]: X120/Y105

Date of issue: 20.05.2025, 08:23

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample. Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com



26688 ASTEN IP44 15W-NW-W


LED wall mounted fitting



Luminous efficiency of the lamp [lm/W]: 97 Ambient temperature range to which the product can be exposed: 5÷30 Connection type: Bolt terminal block Range of sections of wires used [mm²]: 0,75÷1,5 IP class: 44 Kształt: rectangular

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 10 Number of units in the secondary packaging : 1 Number of units in the packaging : 10 Net unit weight [g] : 370 Grammage [g] : 675 Length of a unit pack [cm] : 13 Width of a unit pack [cm] : 5 Height of a unit pack [cm] : 91 Weight of a cardboard box [kg] : 6.75 Width of a cardboard box [cm] : 28 Height of a cardboard box [cm] : 27 Length of a cardboard box [cm] : 93 Volume of a cardboard box [m³] : 0.070308

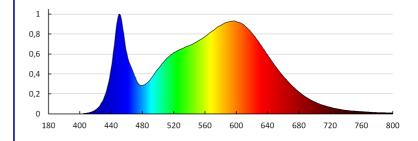





26688 ASTEN IP44 15W-NW-W

LED wall mounted fitting

