

26983 VARSO LED 24W-NW-L-SE

Ceiling-mounted LED light fitting

5905339269836



Kanlux VARSO LED is a family of hermetic ceiling light fixtures with an integrated LED light source. It is a great choice both for developments (housing co-operatives, hotels) and individual households where increased resistance to humidity (IP54) is needed. For lighting particularly large spaces, we recommend 36W Kanlux VARSO HI with a luminous flux up to 3600 lm. Keep in mind that we also offer Kanlux VARSO fixtures with motion sensors (SE).

GENERAL DATA:


Colour: white
Place of assembly: ceiling mounted
Place of application: Indoors and outdoors
Micro-interval between relay contacts: yes
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Wykrywanie ruchu: yes
Length [mm]: 327
Width [mm]: 327
Height [mm]: 49
Sensitivity regulation: yes
Mercury content: no
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 24
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux of the light fitting [lm]: 2280
Useful luminous flux of the light source Φ_{use} [lm]: 2800
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 20000
Luminous-flux-retention factor at the end of rated service life: L70B50
Number of on/off cycles: ≥ 20000
Lighting angle [°]: 120

26983 VARSO LED 24W-NW-L-SE


Ceiling-mounted LED light fitting



Luminous efficiency of the lamp [lm/W]: 95
Ambient temperature range to which the product can be exposed: -20÷35
Enclosure material: plastic
Sensor type: microwave
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 0,5-2,5
Sensor-operation time [second-minute]: 5-5
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
Sensor-operation frequency [MHz]: 5,8
sensor working angle [°]: 360
Illumination-level setpoint by which the sensor detects movement [lx]: 2/10/50/off
IP class: 54
Sensor range[m]: max 9

LOGISTIC DATA:

Packaging method: 10
Number of units in the secondary packaging: 1
Number of units in the packaging: 10
Net unit weight [g]: 1094
Grammage [g]: 1350
Height of a unit pack [cm]: 33.5
Weight of a cardboard box [kg]: 13.5
Width of a cardboard box [cm]: 35
Height of a cardboard box [cm]: 36.5
Length of a cardboard box [cm]: 57
Volume of a cardboard box [m³]: 0.072818

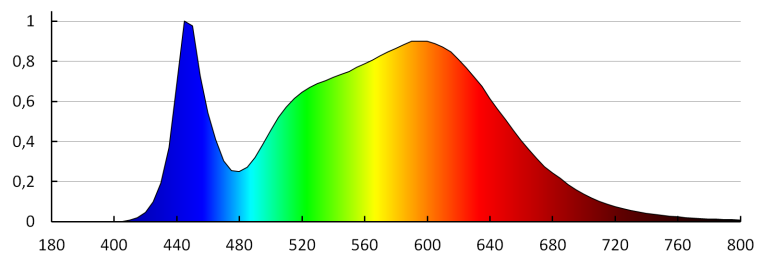

26983 VARSO LED 24W-NW-L-SE

Ceiling-mounted LED light fitting

KANLUX S.A. (kat 26983) VARSO LED 24W-NW-L-SE / LDC (Polar)

Luminaire: KANLUX S.A. (kat 26983) VARSO LED 24W-NW-L-SE
Lamps: 1 x VARSO LED 24W-NW

