


27115 TP SLIM LED 40W-NW

Linear LED luminaire 5905339271150















Kanlux TP SLIM LED is a small hermetic fitting which can be mounted on a surface or in a suspended form. Assembly is convenient thanks to adjustable holders and quick couplings. Owing to IP65 tightness class and IK 08 resistance to impact, you can use the fitting in such places as: industrial rooms, warehouses, car parks and garages.

GENERAL DATA:

Colour: white

Place of assembly: ceiling mounted, wall mounted Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: no

Length [mm]: 1235 Width [mm]: 35 Height [mm]: 55

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 40

Class of protection against electric shock: ||

Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 4400

Useful luminous flux of the light source Φ use [Im] : 5600 Useful luminous flux of the light source Φ use [Im] : in sphere

(360°)

Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 25000

Number of on/off cycles: ≥20000 Lighting angle [°]: X145/Y110

Luminous efficiency of the lamp [lm/W]: 110

Ambient temperature range to which the product can be

exposed: -20÷40

Enclosure material: plastic

Connection type: Self-clamping block

Date of issue: 22.11.2024, 13:40

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





27115 TP SLIM LED 40W-NW

Linear LED luminaire



Range of sections of wires used [mm²]: 1-2,5

Lamp-heating time [s]: <1Lamp-ignition time [s]: ≤ 0.5

IK class: 08 IP class: 65

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 12


Number of units in the packaging: 12

Net unit weight [g]: 560 Grammage [g]: 664.17

Length of a unit pack [cm]: 127.5 Width of a unit pack [cm]: 5.5 Height of a unit pack [cm]: 4


Weight of a cardboard box [kg]: 7.97004
Width of a cardboard box [cm]: 17
Height of a cardboard box [cm]: 18.5
Length of a cardboard box [cm]: 130

Volume of a cardboard box [m3]: 0.040885

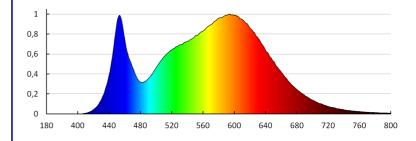

KANLUX S.A. (kat 27115) TP SLIM LED 40W-NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27115) TP SLIM LED 40W-NW Lamps: 1 x TP SLIM LED 40W-NW



Date of issue: 22.11.2024, 13:40

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





27115 TP SLIM LED 40W-NW

Linear LED luminaire

