

# 27116 TP SLIM LED 50W-NW

Linear LED luminaire 5905339271167



1







Kanlux TP SLIM LED is a small hermetic fitting which can be mounted on a surface or in a suspended form. Assembly is convenient thanks to adjustable holders and guick couplings. Owing to IP65 tightness class and IK 08 resistance to impact, you can use the fitting in such places as: industrial rooms, warehouses, car parks and garages.

#### **GENERAL DATA:**

#### Colour: white

Place of assembly: ceiling mounted, wall mounted Place of application: Indoors and outdoors Minimum distance from the illuminated object: 0,5m Possibility of fixture-loop-through connection: yes Compatible with a dimmer: no Length [mm]: 1535 Width [mm]: 35 Height [mm]: 55 Integrated LED light source: yes

#### **TECHNICAL DATA:**

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 50 Class of protection against electric shock : II Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 5500 Useful luminous flux of the light source **Quse** [Im]: 7100 Useful luminous flux of the light source Quse [Im] : in sphere (360°) Colour temperature: white Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses : ≤6 Colour rendering index: 80 Service life [h]: 25000 Number of on/off cycles: ≥20000 Lighting angle [°]: X145/Y110 Luminous efficiency of the lamp [lm/W]: 110 Ambient temperature range to which the product can be exposed: -20÷40 Enclosure material: plastic Connection type: Self-clamping block

Date of issue: 22.11.2024, 13:42

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





## 27116 TP SLIM LED 50W-NW

### Linear LED luminaire






Range of sections of wires used [mm<sup>2</sup>]: 1-2,5 Lamp-heating time [s]: <1 Lamp-ignition time [s]: ≤0,5 IK class: 08 IP class: 65


### LOGISTIC DATA:

Unit of measurement: unit Packaging method: 12 Number of units in the packaging: 12 Net unit weight [g]: 660 Grammage [g]: 778.33 Length of a unit pack [cm]: 157 Width of a unit pack [cm]: 5.5 Height of a unit pack [cm]: 4 Weight of a cardboard box [kg]: 9.33996 Width of a cardboard box [kg]: 17 Height of a cardboard box [cm]: 17 Height of a cardboard box [cm]: 18.5 Length of a cardboard box [cm]: 160 Volume of a cardboard box [m<sup>3</sup>]: 0.05032

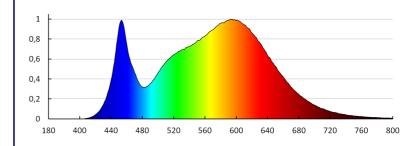

KANLUX S.A. (kat 27116) TP SLIM LED 50W-NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27116) TP SLIM LED 50W-NW Lamps: 1 x TP SLIM LED 50W-NW



Date of issue: 22.11.2024, 13:42 We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





Linear LED luminaire

