Kanlux

27427 ALIN 4LED 1X150-SR-NT

T8 LED tube linear fittings

5905339274274

GENERAL DATA:

Colour: silver
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Fixture lighting direction: down
Power supply of T8 LED fluorescent lamps: Unilateral
Length [mm]: 1540
Width [mm]: 60
Height [mm]: 69

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: max 58
Class of protection against electric shock: I
Lampshade material: plastic
Light source: T8 LED
Light source included: no
Cap: G13
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: matt
Enclosure material: aluminum alloy
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5
IP class: 20

LOGISTIC DATA:

Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 1860
Grammage [g]: 2300
Length of a unit pack [cm]: 182
Width of a unit pack [cm]: 11
Height of a unit pack [cm]: 7
Weight of a cardboard box [kg]: 2.3
Width of a cardboard box [cm]: 11
Height of a cardboard box [cm]: 7
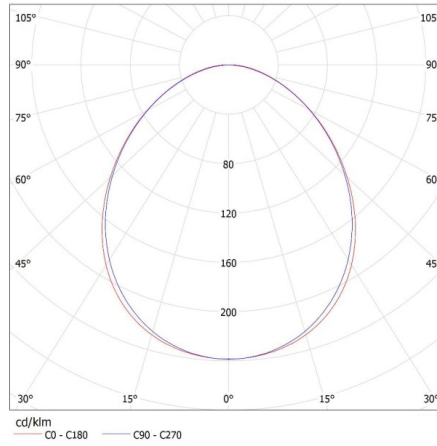**Length of a cardboard box [cm]** : 182
Volume of a cardboard box [m³]: 0.014014

1540

69

60

EN

Kanlux

27427 ALIN 4LED 1X150-SR-NT

T8 LED tube linear fittings

KANLUX S.A. (kat 27427) ALIN 4LED 1X150-SR-NT + GLASSv4 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27427) ALIN 4LED 1X150-SR-NT + GLASSv4
Lamps: 1 x T8 LED GLASSv4 24W-NW
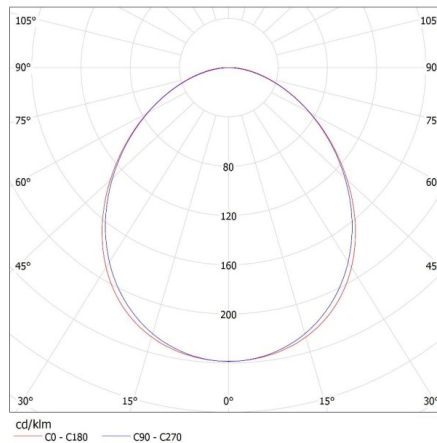

cd/klm
C0 - C180   C90 - C270

KANLUX S.A. (kat 27427) ALIN 4LED 1X150-SR-NT + GLASSv3 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 27427) ALIN 4LED 1X150-SR-NT + GLASSv3
Lamps: 1 x T8 LED GLASSv3 24W-NW

cd/klm
C0 - C180   C90 - C270

EN

Kanlux

27427   ALIN 4LED 1X150-SR-NT

T8 LED tube linear fittings

KANLUX S.A. (kat 27427) ALIN 4LED 1X150-SR-NT + Miledo / **LDC (Polar)**

Luminaire: KANLUX S.A. (kat 27427) ALIN 4LED 1X150-SR-NT + Miledo
Lamps: 1 x T8 LED 22W-NW

cd/klm
—— C0 - C180   —— C90 - C270

EN