Kanlux

27528 ONTEC S 20M1X ST W

Emergency lighting LED

5902052527533

CE **EAC** **CNBOP** **UKCA**
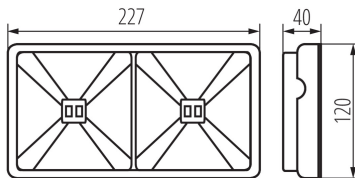
Emergency or anti-panic lighting is used in open space rooms to prevent panic. It allows you to reach a place where you can see the marked escape route as well as for the illumination of the escape route itself, depending on the prism used in the fixture.

GENERAL DATA:

Colour: white
Place of assembly: wall mounted, ceiling mounted
Place of application: Indoors
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Rated power [W]: 3.6
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 371
Luminous flux [lm] (emergency-lighting module): 371(1h)/154(3h)
Colour temperature: cold white
Correlated colour temperature [K]: 5000
Ambient temperature range to which the product can be exposed: 5-40
Battery (type): LiFePO4/C
Battery (parameters): 3,2V 1,5Ah
Operating mode: emergency, emergency and network
Application: anti-panic lighting
Fail-safe working time [h]: 1/3
Standard test: yes
Enclosure material: plastic
Connection type: Self-clamping block
IP class: 65

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 336
Grammage [g]: 374
Length of a unit pack [cm]: 23.5

EN

Kanlux

27528 ONTEC S 20M1X ST W

Emergency lighting LED

Width of a unit pack [cm] : 12.5
Height of a unit pack [cm] : 4.5
Weight of a cardboard box [kg] : 0.374
Width of a cardboard box [cm] : 12.5
Height of a cardboard box [cm] : 4.5
Length of a cardboard box [cm] : 23.5
Volume of a cardboard box [m³] : 0.001322

ACCESSORIES

33829   OPRAWA DWUSTRONNA OS0

33830   UCHW PODT OS S2 S3 IT
28985   ZEST POD OR00 B
33876   ZEST MONT S20 FLAGA

33871   ZEST MONT OS05
33877   ZEST MONT OS205
28974   ZEST MON OS010 W

EN