

## 28010 BRAVO S 40W6060NW W

Recessed-mounted LED panel

5905339280107



Kanlux BRAVO S/SU panels are specially selected components for even greater satisfaction with their use. Aluminium framework, specially selected LED diodes, reflector and diffuser distracting light are just some of the assets of Kanlux BRAVO LED S/SU panels. High luminous efficacy (100lm/W) is another asset of these panels. Kanlux BRAVO LED panels do not have any power supply included.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**The product is not suitable to be covered with a heat-insulating material:** yes

**Feeder included:** no

**A proper LED power supply available in the offer [index] is required for proper operation. :** 28026

**Length [mm]:** 595

**Width [mm]:** 595

**Height [mm]:** 11

**Integrated LED light source:** yes

**Number of modules (LED light source):** 2

### TECHNICAL DATA:

**Power-supply current [mA]:** 1050

**Maximum power [W]:** 40

**Class of protection against electric shock:** III

**Lampshade material:** plastic

**Enclosure material:** steel

**Panel/frame material:** aluminum alloy

**Diode type:** LED SMD

**Luminous flux of the light fitting [lm]:** 4000

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 2800

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** white


**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** ≤6



## 28010 BRAVO S 40W6060NW W

Recessed-mounted LED panel

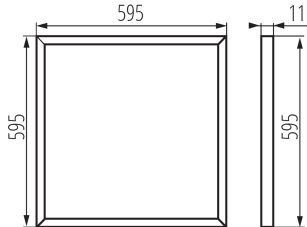

**Colour rendering index:** 80

**Service life [h]:** 25000

**Number of on/off cycles:**  $\geq 15000$

**Lighting angle [°]:** 110

**Luminous efficiency of the lamp [lm/W]:** 100

**Ambient temperature range to which the product can be exposed:** 5÷25

**Connection type:** przewód zakończony wtyczką - DC

**Wire type:** H03VVH2-F

**Wire length [m]:** 0.05

**Wire diameter [mm²]:** 0,5

**Supply-cord type:** direct current

**Power-supply type:** direct current

**IP class:** 20

**Kształt:** square

**Energy efficiency class:** D

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 6

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 6

**Net unit weight [g]:** 2360

**Grammage [g]:** 2793.33

**Length of a unit pack [cm]:** 62

**Width of a unit pack [cm]:** 2.5

**Height of a unit pack [cm]:** 62

**Weight of a cardboard box [kg]:** 16.75998

**Width of a cardboard box [cm]:** 13

**Height of a cardboard box [cm]:** 64

**Length of a cardboard box [cm]:** 64


**Volume of a cardboard box [m³]:** 0.053248

### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- The correct LED power supply available in the KANLUX range is required for proper operation
- LED panel without power supply included


28010 BRAVO S 40W6060NW W

Recessed-mounted LED panel

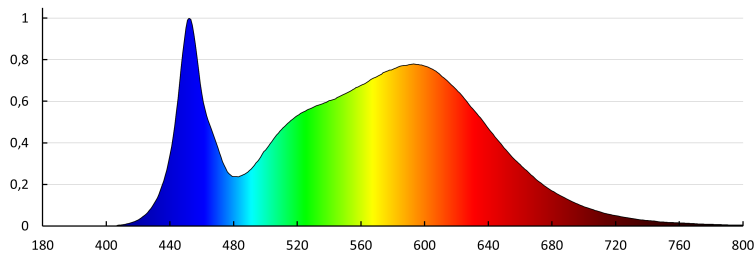

KANLUX S.A. (kat 28010) BRAVO S 40W6060NW W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28010) BRAVO S 40W6060NW W  
Lamps: 1 x BRAVO S 40W6060NW

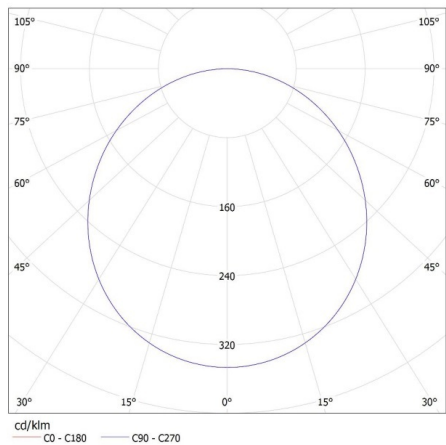

ACCESSORIES

28502



CLIPS BRAVO S/P 60-62

Mounting support, used for building in BRAVO 6060/6262 fittings in a plasterboard suspended ceiling, 4 pcs. in a set (28502)

28503



CLIPS BRAVO S/P 12030

Mounting support, used for building in BRAVO 12030 fittings in a plasterboard suspended ceiling, 6 pcs. in a set (28503)


28501

BRAVO S/P GRIP 12030

NT mounting holder 6 pcs. in a set (28501)

28010 BRAVO S 40W6060NW W

Recessed-mounted LED panel



<b>27613</b>	ADTR 6060 W	Surface mounting frame for panel 600x600 (27613)
--------------	-------------	--



<b>27610</b>	ADTR 6060 SR	Surface mounting frame for panel 600x600 (27610)
--------------	--------------	--



<b>27615</b>	ADTR 6060 B	Surface mounting frame for panel 600x600 (27615)
--------------	-------------	--



<b>27611</b>	ADTR 12030 W	Surface mounting frame for panel 120x30 (27611)
--------------	--------------	---




<b>27612</b>	ADTR 12030 SR	Surface mounting frame for panel 120x30 (27612)
--------------	---------------	---



28010 BRAVO S 40W6060NW W

Recessed-mounted LED panel

28026	BRAVO DRIVER 40W	LED power supply unit dedicated to BRAVO S / SU panels with power of 40W (28026)
		
25591	PSR 100	Safety rope (25591)
