

LED dustproof lighting fitting

5905339288523



GENERAL DATA:

Colour: grey

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: no

Length [mm]: 1180

Width [mm]: 80

Height [mm]: 70

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 28

Class of protection against electric shock: I

Lampshade material: PC

Diode type: LED SMD

Luminous flux [lm]: 4300

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 3

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X70/Y95

Luminous efficiency of the lamp [lm/W]: 154

Ambient temperature range to which the product can be exposed: -25÷40

Shade type: prismatic, narrow-beam

Enclosure material: PC

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5


Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

Maximum number of loop-through-connected fixtures: 10

IK class: 08

IP class: 65

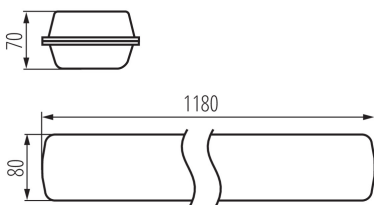


LOGISTIC DATA:

Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 1990
Grammage [g]: 2170
Length of a unit pack [cm]: 120
Width of a unit pack [cm]: 8
Height of a unit pack [cm]: 7
Weight of a cardboard box [kg]: 2.17
Width of a cardboard box [cm]: 9
Height of a cardboard box [cm]: 7.5
Length of a cardboard box [cm]: 120
Volume of a cardboard box [m³]: 0.0081

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

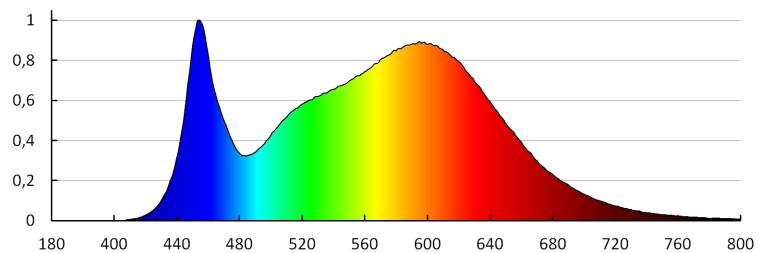

KANLUX S.A. (kat 28852) FT1200 28W-840-INT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28852) FT1200 28W-840-INT
Lamps: 1 x FT1200 28W-840-INT

