


LED dustproof lighting fitting

5905339288530











Colour: grey

Place of assembly: ceiling mounted, wall mounted Place of application: Indoors and outdoors Minimum distance from the illuminated object: 0,5m Possibility of fixture-loop-through connection: yes Compatible with a dimmer: no Length [mm]: 1180 Width [mm]: 80 Height [mm]: 70 Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 28 Class of protection against electric shock: | Lampshade material: PC Diode type: LED SMD Luminous flux [lm]: 4300 Colour temperature: white Correlated colour temperature [K]: 4000 **Colour consistency in McAdam ellipses**: ≤3 Colour rendering index: 80 Service life [h]: 50000 Luminous-flux-retention factor at the end of rated service life: L90B10 Number of on/off cycles: ≥30000 Lighting angle [°]: X75/Y95 Luminous efficiency of the lamp [lm/W]: 154 Ambient temperature range to which the product can be exposed: -25÷40 Shade type: prismatic, asymmetric Enclosure material: PC **Connection type**: Self-clamping block Range of sections of wires used [mm²]: 1,5÷2,5 Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤0,5 Maximum number of loop-through-connected fixtures: 10 **IK class: 08 IP class**: 65






LED dustproof lighting fitting


LOGISTIC DATA:

Packaging method: 1 Number of units in the secondary packaging: 1 Number of units in the packaging: 1 Net unit weight [g]: 1990 Grammage [g]: 2170 Length of a unit pack [cm]: 120 Width of a unit pack [cm]: 120 Width of a unit pack [cm]: 7 Weight of a cardboard box [kg]: 2.17 Width of a cardboard box [cm]: 9 Height of a cardboard box [cm]: 7.5 Length of a cardboard box [cm]: 120 Volume of a cardboard box [m³]: 0.0081

ADDITIONAL INFORMATION:

 5 years Warranty under the terms of the warranty statement, available on our website

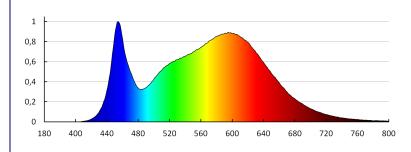



Luminaire: KANLUX S.A. (kat 28853) FT1200 28W-840-ASY Lamps: 1 x FT1200 28W-840-ASY

