

28866 FTHL1500 73W-840-OPL

LED dustproof lighting fitting

5905339288660


















GENERAL DATA:

Colour: grey

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m **Possibility of fixture-loop-through connection**: yes

Compatible with a dimmer: DALI

Length [mm]: 1480 Width [mm]: 80 Height [mm]: 70

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 73

Class of protection against electric shock: |

Lampshade material: PC
Diode type: LED SMD
Luminous flux [Im]: 9400
Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤3

Colour rendering index: 80 Service life [h]: 50000

Luminous-flux-retention factor at the end of rated

service life: L90B10

Number of on/off cycles: ≥30000 Lighting angle [°]: X130/Y110

Luminous efficiency of the lamp [lm/W]: 129

Ambient temperature range to which the product can be

exposed: -25÷35 Shade type: opal Enclosure material: PC


Connection type: Self-clamping block

Range of sections of wires used [mm 2]: 0,5 \div 2,5

Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤ 0.5

Maximum number of loop-through-connected fixtures: 7

IK class: 08 IP class: 65





28866 FTHL1500 73W-840-OPL

LED dustproof lighting fitting

LOGISTIC DATA:

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1


Net unit weight [g]: 2360 Grammage [g]: 2590

Length of a unit pack [cm]: 150 Width of a unit pack [cm]: 8 Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.59
Width of a cardboard box [cm]: 9
Height of a cardboard box [cm]: 7.5
Length of a cardboard box [cm]: 150
Volume of a cardboard box [m³]: 0.010125


ADDITIONAL INFORMATION:


• 5 years Warranty under the terms of the warranty statement, available on our website

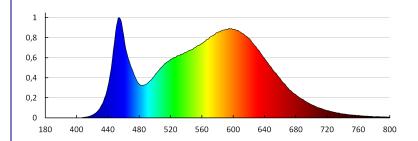

KANLUX S.A. (kat 28866) FTHL1500 73W-840-OPL / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28866) FTHL1500 73W-840-OPL Lamps: 1 x FTHL1500 73W-840-OPL





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

