

### **28938** ROUNDA V2LED6W-WW-W

Downlight fitting 5905339289384





















Kanlux ROUNDA V2LED is a new version of popular round downlight luminaires for indoor use. The downlights combine aesthetic design with light obtained thanks to LED technology. No water or dust can get to the inside owing to the high class of tightness (IP44).

#### **GENERAL DATA:**

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating

material: yes Height [mm]: 20 Diameter [mm]: 120

Assembly hole [mm]: Ø106 Integrated LED light source: yes

#### **TECHNICAL DATA:**

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 6

Class of protection against electric shock: ||

Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 300

Useful luminous flux of the light source  $\Phi$ use [lm] : 670 Useful luminous flux of the light source  $\Phi$ use [lm] : in sphere

(360°)

Colour temperature: Warm white

Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Cap (Light source): wires Service life [h]: 15000

Number of on/off cycles: ≥20000

Lighting angle [°]: 110

Luminous efficiency of the lamp [lm/W]: 50

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy Connection type: Free cable ends

Date of issue: 23.09.2024, 14:41


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





# 28938 ROUNDA V2LED6W-WW-W

#### Downlight fitting





Wire length [m]: 0.05 Wire diameter [mm²]: 0.75 Lamp-heating time [s]: ≤1 Lamp-ignition time [s]: ≤0,5

**IP class**: 44/20

#### **LOGISTIC DATA:**


Unit of measurement: unit Packaging method: 40

Number of units in the secondary packaging: 1

Number of units in the packaging: 40

Net unit weight [g]: 140
Grammage [g]: 204.5
Gross unit weight [g]: 180
Length of a unit pack [cm]: 13
Width of a unit pack [cm]: 3
Height of a unit pack [cm]: 19

Weight of a cardboard box [kg]: 8.18
Width of a cardboard box [cm]: 33
Height of a cardboard box [cm]: 29
Length of a cardboard box [cm]: 40
Volume of a cardboard box [m³]: 0.03828

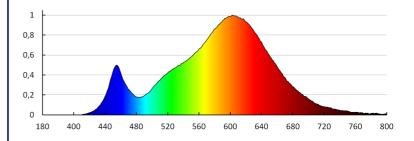



# 28938 ROUNDA V2LED6W-WW-W

## Downlight fitting

