

# **28990** REKA LED EL 7W-L-GR

### Facade luminaire

5905339289902
























A visually interesting light effect, which we create by adjusting the angle of the light beam, is the basic advantage of Kanlux REKA LED. With the masking flaps, we can change the angle of illumination by ourselves - at the top and bottom of the luminaire. Kanlux REKA LED can be used to light interiors, as well as building facades due to its IP54 tightness.

#### **GENERAL DATA:**

Colour: graphite

Place of assembly: wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: no

Fixture lighting direction: up and down

Length [mm]: 100 Width [mm]: 100 Height [mm]: 100

Integrated LED light source: yes

#### TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 7

Class of protection against electric shock: |

**Diode type**: LED COB

Luminous flux [lm]: max 360 Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 30000

Number of on/off cycles: ≥20000

Lighting angle [°]: max 90

Ambient temperature range to which the product can be

exposed: -15÷35

Enclosure material: aluminum alloy

Protective glass material: Tempered glass Connection type: Bolt terminal block Range of sections of wires used [mm<sup>2</sup>]: 1

Lamp-heating time [s]:  $\leq 1$ Lamp-ignition time [s]:  $\leq 0.5$ 

IP class: 54

Date of issue: 16.11.2022, 04:19

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





# **28990** REKA LED EL 7W-L-GR

### Facade luminaire





## LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 560 Grammage [g]: 642


Length of a unit pack [cm]: 11 Width of a unit pack [cm]: 11 Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 12.84 Width of a cardboard box [cm]: 23.5 Height of a cardboard box [cm]: 28 Length of a cardboard box [cm]: 57

Volume of a cardboard box [m³]: 0.037506

# ADDITIONAL INFORMATION:

- · Beam-angle adjustment
- 5 years Warranty under the terms of the warranty statement, available on our website

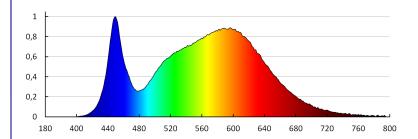

KANLUX S.A. (kat 28990) REKA LED EL 7W-L-GR / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28990) REKA LED EL 7W-L-GR Lamps: 1 x REKA LED EL 7W-L-GR

