


28991 REKA LED EL 7W-O-GR

Facade luminaire

5905339289919

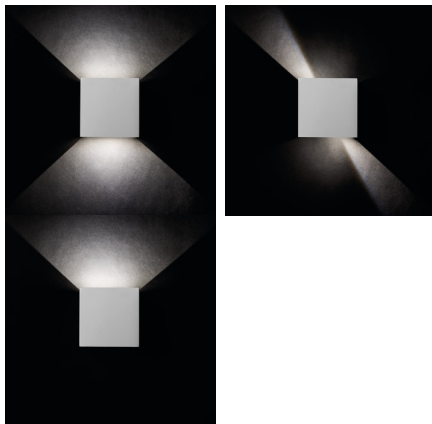

The main advantage of Kanlux REKA LED is a visually unique light effect, which we create ourselves after switching on. Thanks to the wings placed at the bottom and top of the luminaire, we can decide on the direction and width of the luminous flux. The Kanlux REKA lamp shines in two directions - up and down - and the luminous flux can be set independently of each other, creating, for example, a perfectly thin line of light at the top, and at the bottom by setting wide light cascades that will flow from the lamp to the ground. Kanlux REKA LED can be used to illuminate the facades of buildings, terraces, balconies or gazebos' external walls.

GENERAL DATA:


Colour: graphite
Place of assembly: wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Wykrywanie ruchu: no
Fixture lighting direction: up and down
Length [mm]: 135
Width [mm]: 115
Height [mm]: 100
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 7
Class of protection against electric shock: I
Diode type: LED COB
Luminous flux [lm]: max 380
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Service life [h]: 30000
Number of on/off cycles: ≥20000
Lighting angle [°]: max 90
Ambient temperature range to which the product can be exposed: -15÷35
Enclosure material: aluminum alloy
Protective glass material: Tempered glass
Connection type: Bolt terminal block

28991 REKA LED EL 7W-O-GR

Facade luminaire

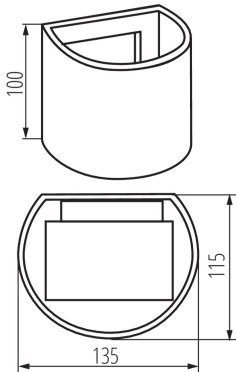

Range of sections of wires used [mm²]: 1

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

IP class: 54

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 570

Grammage [g]: 678

Length of a unit pack [cm]: 15

Width of a unit pack [cm]: 12

Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 13.56

Width of a cardboard box [cm]: 31


Height of a cardboard box [cm]: 25

Length of a cardboard box [cm]: 62

Volume of a cardboard box [m³]: 0.04805

ADDITIONAL INFORMATION:

- Beam-angle adjustment
- 5 years Warranty under the terms of the warranty statement, available on our website

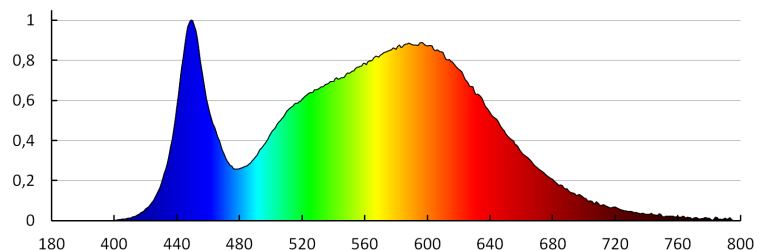

28991 REKA LED EL 7W-O-GR

Facade luminaire

KANLUX S.A. (kat 28991) REKA LED EL 7W-O-GR / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28991) REKA LED EL 7W-O-GR
Lamps: 1 x REKA LED EL 7W-O-GR

