


29225 STATO HI LED 50W-B

LED floodlight

5905339292254

IP
65

HI
GH
efficacy



Kanlux STATO HI LED is a portable floodlight with high tightness (IP65). Recommended as lighting during renovations or construction works. Adjusting the angle of the floodlight and the stand allows you to illuminate surfaces in many planes, and a higher color rendering index than in most floodlights (CRI = 80) means better visibility of the color of the illuminated surface, which is especially useful in interiors. The Kanlux STATO HI LED model also has higher luminous efficiency - 120lm / W. The set includes a 2-meter cable with a plug.

GENERAL DATA:


Colour: black
Place of assembly: On the floor
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 1m
Compatible with a dimmer: no
Wykrywanie ruchu: no
Width [mm]: 290
Height [mm]: 278
Depth [mm]: 198
Mercury content: no
Mercury content in the lamp [mg]: 0
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 50
Class of protection against electric shock: I
Diode type: LED SMD
Luminous flux [lm]: 6000
Useful luminous flux of the light source Φ_{use} [lm]: 5140
Useful luminous flux of the light source Φ_{use} [lm]: in wide cone (120°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: 6
Colour rendering index: 80
Service life [h]: 25000
Number of on/off cycles: ≥ 15000
Lighting angle [°]: 120
Luminous efficiency of the lamp [lm/W]: 120

29225 STATO HI LED 50W-B

LED floodlight

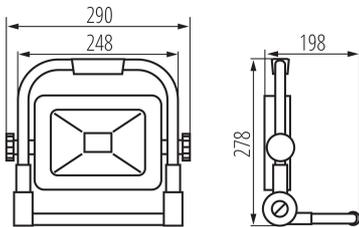

Ambient temperature range to which the product can be exposed: -20÷35

Enclosure material: aluminum alloy

Protective glass material: Tempered glass

Extension-arm material: steel

Connection type: Cable terminated with a plug

Wire type: H05RN-F

Wire length [m]: 2

Wire diameter [mm²]: 1

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

The fixture is movable vertically [°]: 330

IK class: 07

IP class: 65

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 4

Number of units in the secondary packaging: 1

Number of units in the packaging: 4

Net unit weight [g]: 1538

Grammage [g]: 1772.5

Gross unit weight [g]: 1672

Length of a unit pack [cm]: 30

Width of a unit pack [cm]: 6.5

Height of a unit pack [cm]: 29


Weight of a cardboard box [kg]: 7.09

Width of a cardboard box [cm]: 29

Height of a cardboard box [cm]: 31

Length of a cardboard box [cm]: 32

Volume of a cardboard box [m³]: 0.028768

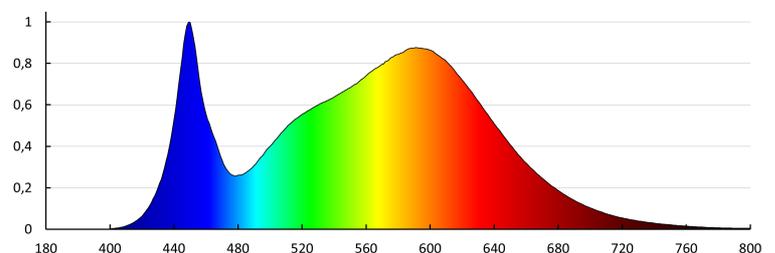

29225 STATO HI LED 50W-B

LED floodlight

