

Facade luminaire

5905339292612



Kanlux BISO are facade fittings characterized by simple and attractive design. They can be used as a fitting for interiors (they have an appropriate CRI coefficient), at the same time they can be used on building facades (IP54). In Kanlux BISO holder light falling from the LED module is softly diffused on facade and a rear part of the holder.


GENERAL DATA:

Colour: white
Place of assembly: wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Wykrywanie ruchu: no
Length [mm]: 220
Width [mm]: 90
Height [mm]: 80
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Power factor: 0.5
Maximum power [W]: 8
Class of protection against electric shock: I
Diode type: LED COB
Luminous flux [lm]: 375
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Service life [h]: 25000
Number of on/off cycles: ≥25000
Luminous efficiency of the lamp [lm/W]: 47
Ambient temperature range to which the product can be exposed: -15÷40
Enclosure material: aluminum alloy
Protective glass material: plastic
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 1,5÷2,5
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 54

Facade luminaire



LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 580

Grammage [g]: 686

Length of a unit pack [cm]: 23

Width of a unit pack [cm]: 9

Height of a unit pack [cm]: 10


Weight of a cardboard box [kg]: 13.72

Width of a cardboard box [cm]: 22

Height of a cardboard box [cm]: 48

Length of a cardboard box [cm]: 48

Volume of a cardboard box [m³]: 0.050688

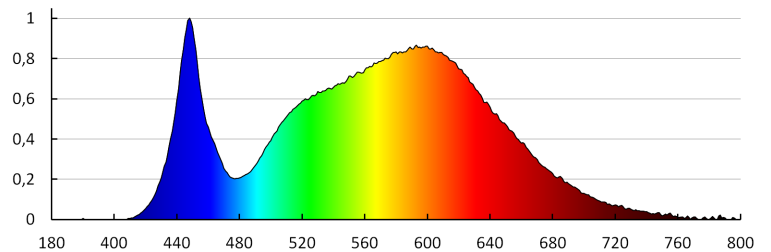

KANLUX S.A. (kat 29261) BISO LED EL 8W-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 29261) BISO LED EL 8W-W
Lamps: 1 x BISO LED EL 8W-W

