



Linear LED luminaire

5905339294692

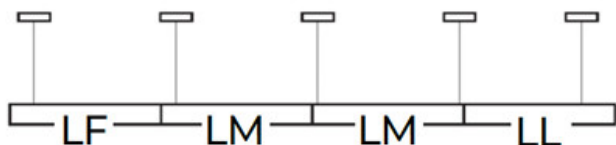

**DALI**  
system

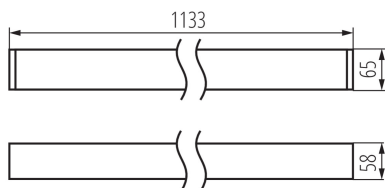

### GENERAL DATA:

**Colour:** white

**Place of assembly:** ceiling mounted

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** DALI

**Fixture lighting direction:** down

**Length [mm]:** 1133

**Width [mm]:** 58

**Height [mm]:** 65

**Integrated LED light source:** yes

**Version for connection in line [initial element]:** 32235 (NT), 32043 (Z)

**Version for connection in line [central element]:** 32259 (NT), 32067 (Z)

**Version for connection in line [final element]:** 32283 (NT), 32091 (Z)

**Explanation of markings and signs used:** (NT) - ceiling mounted, (Z) - for suspension on the ceiling

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 33

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 2830

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:**  $\leq 6$

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L80B10

**Number of on/off cycles:**  $\geq 30000$

**Lighting angle [°]:** X75/Y90

**Luminous efficiency of the lamp [lm/W]:** 86

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** microprismatic

**Enclosure material:** aluminum alloy


**Connection type:** Self-clamping block

**Range of sections of wires used [mm<sup>2</sup>]:** 0,5÷2,5

**Lamp-heating time [s]:**  $\leq 1$

**Lamp-ignition time [s]:**  $\leq 0,5$

### Linear LED luminaire

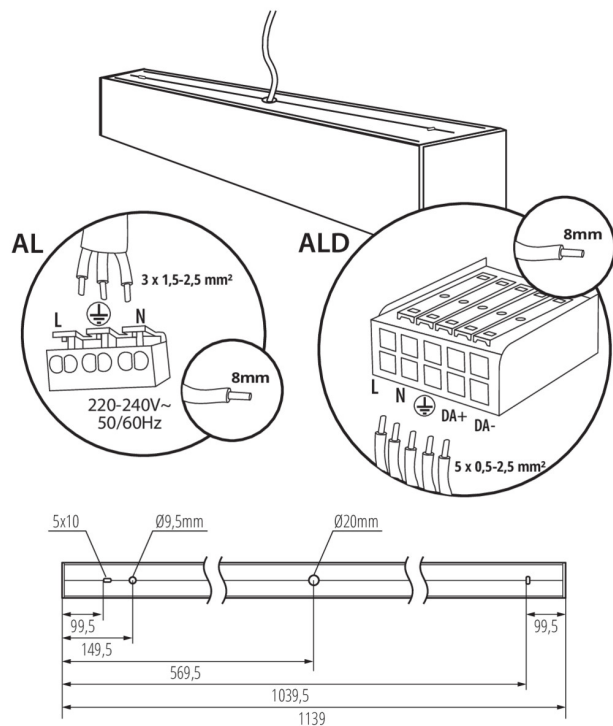

IP class: 20

#### LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2014

Grammage [g]: 2350

Length of a unit pack [cm]: 136

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.35

Width of a cardboard box [cm]: 11


Height of a cardboard box [cm]: 7

Length of a cardboard box [cm]: 136

Volume of a cardboard box [m³]: 0.010472

#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

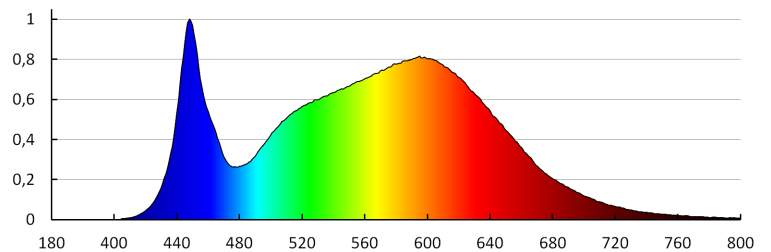

#### ACCESSORIES:

**32543** ALIN CORD DALI 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, white, 150 cm



**32544** ALIN CORD DALI 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, black, 150 cm



### Linear LED luminaire

**32545** ALIN CORD DALI 1F-SR



Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, silver, 150 cm

**07871** ROPE-NT 150 SINGLE



ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

**29557** ALIN NT GRIP



Wall bracket for the ALIN luminaire, 2 pcs included

**25979** KLOSZ MPR AL 23W/33W



MPR shade for fitting ALIN, MPR SHADE AL 23W/33W,(25979)