

29581 AREL LED DO 6W-WW

Downlight fitting

5905339295811













Kanlux AREL LED is a new family of downlights which do not have frame. High tightness class IP65/20 and exceptional, simple, and at the same time surprising design make Kanlux AREL LED fit into each interior. Thanks to the unique structure, the panel is only 9 mm thick - it is the thinnest panel available on the market.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-

insulating material: yes
Height [mm]: 23
Diameter [mm]: 75

Assembly hole [mm]: Ø60 Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 6

Class of protection against electric shock: ||

Lampshade material: PMMA Diode type: LED SMD

Luminous flux [lm]: 440

Useful luminous flux of the light source Φ use [lm]: 650 Useful luminous flux of the light source Φ use [lm]: in

sphere (360°)

Colour temperature: Warm white

Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Service life [h]: 15000

Number of on/off cycles: ≥30000

Lighting angle [°]: 120

Luminous efficiency of the lamp [lm/W]: 73

Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: aluminum alloy **Connection type**: Terminal block

Range of sections of wires used [mm²]: 0,75-1,5

Lamp-heating time [s]: ≤ 1

Date of issue: 16.11.2022, 05:31


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





29581 AREL LED DO 6W-WW

Downlight fitting





Lamp-ignition time [s]: ≤ 0.5

IP class: 65/20

LOGISTIC DATA:


Packaging method: 100

Number of units in the packaging: $100\,$

Net unit weight [g]: 90 Grammage [g]: 122

Length of a unit pack [cm]: 10.5 Width of a unit pack [cm]: 3 Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 12.2 Width of a cardboard box [cm]: 23 Height of a cardboard box [cm]: 24.5 Length of a cardboard box [cm]: 78 Volume of a cardboard box [m³]: 0.043953

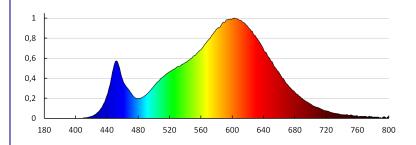

KANLUX S.A. (kat 29581) AREL LED DO 6W-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 29581) AREL LED DO 6W-WW Lamps: 1 x AREL LED DO 6W-WW

