

## **29606** XLED A60 10W-NW

LED light source 5905339296061























Kanlux XLED combines the best features of traditional bulbs and modern LED light sources. Therefore, we talk about it as the first real LED bulb. A glass bulb in the shape of a traditional bulb and LED diodes placed in such a way so that light can part in all directions, and the angle of light comes to even 320 degrees!

### **GENERAL DATA:**

Colour: transparent

Lamp designed for decorative lighting: Not applicable

Compatible with a dimmer: no

Width [mm]: 60 Height [mm]: 105 Diameter [mm]: 60 Depth [mm]: 60 Mercury content: no

### **TECHNICAL DATA:**

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Lamp-power factor: 0.5 Rated power [W]: 10 Lampshade material: glass

Light source: A60

**Diode type:** LED FILAMENT

Total rated luminous flux [lm]: 1520

Useful luminous flux of the light source  $\Phi$ use [lm]: 1520 Useful luminous flux of the light source  $\Phi$ use [lm]: in sphere

(360°)

Colour temperature: white

Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 80 Cap (Light source): E27

Rated lamp-service life [h]: 10000 Number of on/off cycles: ≥15000


Rated beam angle [°]: 320 Rated light level [°]: 320 Lamp rated current [mA]: 80

Annual power consumption [kWh/1000h]: 10 Luminous efficiency of the lamp [lm/W]: 152

**Ignition time** [s]:  $\leq 0.5$ 

Lamp-heating time to 60% of the full luminous flux [s]:

Negligible








# **29606** XLED A60 10W-NW

## LED light source





Lamp-heating time to 95% [s]: <2

Lamp premature-failure indicator: <5% po 1000h

Lamp service life factor after the period of 6000h [%] : ≥90 Luminous flux retention factor at the end of rated service life

**[%]**: ≥70

Luminous flux retention factor after the period of 6000h [%]:

≥80

Light source shape: standard

## **LOGISTIC DATA:**

Unit of measurement: unit Packaging method: 10

Number of units in the secondary packaging: 10


Number of units in the packaging: 100

Net unit weight [g]: 34 Grammage [g]: 66

Gross unit weight [g]: 55
Length of a unit pack [cm]: 6.5
Width of a unit pack [cm]: 12
Weight of a cardboard box [kg]: 6.6
Width of a cardboard box [cm]: 35.5

Width of a cardboard box [cm]: 35.5 Height of a cardboard box [cm]: 26.5 Length of a cardboard box [cm]: 69

Volume of a cardboard box [m³]: 0.064912

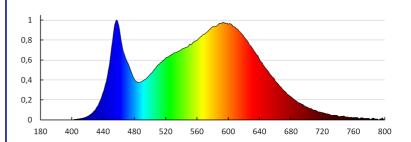







# 29606 XLED A60 10W-NW

# LED light source





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

