

GENERATION


29623 XLED C35E14 6W-NW-M

LED light source 5905339296238











Kanlux XLED combines the best features of traditional bulbs and modern LED light sources. Therefore, we talk about it as the first real LED bulb. A mat bulb in the shape of a traditional "candle" and LED diodes placed in such a way so that light can part in all directions, and the angle of light comes to even 320 degrees!

GENERAL DATA:

Colour: white Lamp designed for decorative lighting: Not applicable Compatible with a dimmer: no Width [mm]: 35 Height [mm]: 97 Diameter [mm]: 35 Depth [mm]: 35 Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Lamp-power factor: 0.5 Rated power [W]: 6 Lampshade material: glass Light source: C35 Diode type: LED FILAMENT Total rated luminous flux [Im]: 810 Useful luminous flux of the light source Quse [Im]: 810 Useful luminous flux of the light source Quse [Im] : in sphere (360°) Colour temperature: white Correlated colour temperature [K]: 4000 Colour consistency in McAdam ellipses : ≤6 Colour rendering index: 80 Cap: E14 Rated lamp-service life [h]: 10000 Number of on/off cycles: ≥15000 Rated beam angle [°]: 320 Rated light level [°]: 320 Lamp rated current [mA]: 48 Annual power consumption [kWh/1000h]: 6 Luminous efficiency of the lamp [lm/W]: 135 Ignition time $[s]: \le 0.5$ Lamp-heating time to 60% of the full luminous flux [s] : Negligible

Date of issue: 10.07.2023, 11:16


We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.





29623 XLED C35E14 6W-NW-M

LED light source

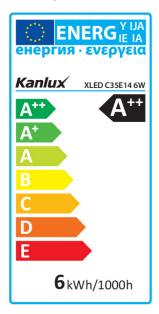




Lamp-heating time to 95% [s]: <2 Lamp premature-failure indicator : <5% po 1000h Lamp service life factor after the period of 6000h [%] : \geq 90 Luminous flux retention factor at the end of rated service life [%]: \geq 70 Luminous flux retention factor after the period of 6000h [%] : \geq 80 Declaration of equality in power rating [W] : 60 Light source shape : świeczka

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 10 Number of units in the secondary packaging: 10 Number of units in the packaging: 100 Net unit weight [g]: 16 Grammage [g]: 32 Length of a unit pack [cm]: 4 Width of a unit pack [cm]: 4 Height of a unit pack [cm]: 11 Weight of a cardboard box [kg]: 3.2 Width of a cardboard box [cm]: 22 Height of a cardboard box [cm]: 25 Length of a cardboard box [cm]: 42 Volume of a cardboard box [m³]: 0.0231

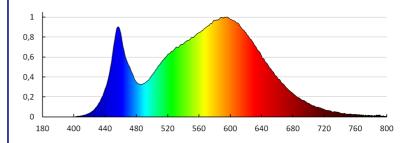





29623 XLED C35E14 6W-NW-M

LED light source

